

OFFICE OF THE EXECUTIVE ENGINEER JAL SHAKTI (PHE) DIVISION QAZIGUND

Allotment Order No:PHQ/CC/ 116 of 2022-23 dated 05/11/2022

No:PHQ/1771-74 DATE: 05/11/2022

NAME : Mohd.Amin Zargar S/O.Ab.Karim R/O.Drenen Panzath ✓

email: @gmail.com

Cell No. 9906879586

REGD. NO: 22-DEE/SE-R&B/Ang-Pul /2009-10

ACCOUNT NO:0017010100002307

GSTN: 01AAUPZ9693E3ZP

PAN: AAUPZ9693E

Administrative Approval No.

58-DB of 2022 ✓

Dated

20/7/2022 ✓

Technical Sanction No.

PHEQ/DB 50 of 2022 ✓

Dated

25-08-2022 ✓

Alloted Cost; Rs:- 866796/=

Rupees :- Eight Lakhs Sixty Six thousands Seven Hundred Ninety Six only ✓

Completion Time

60 Days

Name of Schemes:- L/F of pipes incl. P/F of pipe specials WSS Levdura Kuchpora (Under JJM) ✓

References:1. Your tender received in response to E-NIT No.02 of 2022-23 ISSUED UNDER NO:PHQ/225-40 Dated 18/04/2022 (Tender ID: 2022_PHE_167000_38) read with CORRIGENDUM-I vide No. PHQ/CC/619-27 Date:- 10-05-2022

For & on behalf of Lt. Governor of J&K , contract for above noted work is here by fixed with you on your quoted percentage rates, terms & conditions and are reproduced hereunder:-

Sl. No.	Description of Work / Item(s)	Qty	Unit	Estd. Rate	Amount
1	Earth work in excavation by manual means in trenches for foundations, drains, pipes, cables etc. (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides and ramming of bottoms lift upto 1.5 m, including getting out excavated earth and disposal of surplus excavated earth as directed:				0.00
1.01	All Kinds of soils ✓	241.660 ✓	Cum	436.000 ✓	105363.76
1.02	Ordinary Rock	103.570 ✓	Cum	967.850 ✓	100240.22
2	Extra for every additional lift of 1.5 m or part thereof in excavation/banking excavated or stacked material All kinds of soil :	10.890 ✓	Cum	81.650 ✓	889.17
3	Laying and fitting of G.I. pipes (all classes) complete including cost of pipes specials but excluding cost of pipes and Earth work.				0.00
3.01	40 mm dia GI pipes ✓	400.000 ✓	Mtr	40.800 ✓	16320.00
3.02	25 mm dia GI pipes ✓	700.000 ✓	Mtr	30.650 ✓	21455.00
3.03	20 mm dia GI pipes ✓	500.000 ✓	Mtr	20.250 ✓	10125.00
3.04	15 mm dia GI pipes ✓	300.000 ✓	Mtr	20.250 ✓	6075.00
4	Providing and fixing of MS Flanges to pipes including Cost of nuts ,bolts, washers etc complete job. ✓				0.00
4.01	100 mm dia GI Pipe ✓	67.000 ✓	Pairs	1500.000 ✓	100500.00
5	Provision for installation of house connections to unconnected household including providing and fixing of necessary pipe specials, Earth work at connection and Whatever Necessary. ✓	19.000 ✓	No	1500.000 ✓	28500.00

6	Providing and fixing C.I. double acting air valve of approved quality with bolts, nuts, rubber insertions etc. complete (The tail pieces, tapers etc. if required will be paid				0.00
6.01	150 mm dia DI Pipe	1.000	No	15000.000	15000.00
6.02	100 mm dia DI Pipe	2.000	No	9000.000	18000.00
7	Providing and fixing of Sluice Valves for regulation of water supply including all carriage Complete				0.00
7.01	150mm Dia Sluice Valve	1.000	No	22500.000	22500.00
7.02	100 mm Dia Sluice Valve	4.000	No	8500.000	34000.00
8	Providing Laying of Dry stone solling tightly hand packed.	1.630	Cum	616.400	1004.73
9	Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centring and shuttering. All work upto plinth level with:1:4:8 (1 cement : 4 coarse sand : 8 graded stone aggregate 40 mm nominal size)	1.090	Cum	4861.835	5299.40
10	Providing and laying in position specified grade of reinforced cement concrete including curing but excluding the cost of centering, shuttering, finishing and reinforcement. All works upto plinth level.1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	1.630	Cum	7800.760	12715.24
11	Reinforced cement concrete work in walls (any thickness) including attached pilasters, buttresses, plinth and string courses, fillets, columns, pillars, piers, abutments, posts and struts upto floor five level including curing but excluding cost of centering shuttering, finishing and reinforcement. 1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	4.590	Cum	9408.135	43183.34
12	Reinforced cement concrete work in beams, suspended floors, roofs having slope upto 15°, landings, balconies, shelves, chajjas, lintels, bands, plain window sills, staircases and spiral stair cases upto five level including curing but excluding the cost of centring, shuttering, finishing and reinforcement with 1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	0.670	Cum	9849.345	6599.06
13	Centering and shuttering including strutting, propping etc. and removal of form for:				0.00

11 Foundations for
etc. for mass
3.02 Walls (any
pilasters
columns
13.03 Sl
13.0

[Handwritten signature]
TO

[Handwritten signature]
11/2/20

11	Foundations, footings, bases of columns etc for mass concrete.	3.300	Sqm	262.300	865.59
13.02	Walls (any thickness) including attached pilasters, buttresses, plinth and string courses etc	61.200	Sqm	573.850	35119.62
13.03	Suspended floors, roofs, landings, balconies and access platforms.	5.760	Sqm	635.600	3661.06
13.04	Edges of slabs and breaks in floors and walls	10.800	Sqm	242.300	2616.84
14	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level. Thermo-Mechanically Treated bars of grade Fe-500D or more.	552.000	Kg	91.138	50308.18
15	Steel work welded in built up sections/framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required. In gratings, frames, guard bar, ladder, railings, brackets, gates and similar works.	250.000	Kg	153.295	38323.75
16	Demolishing cement concrete manually/by mechanical means including disposal of material within 50 meters lead as per direction of Engineer-in charge:1:3:6 or richer mix (i/c equivalent design mix)	12.000	Cum	1569.200	18830.40
17	Providing and laying cement concrete in retaining walls, return walls, walls (any thickness) including attached pilasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchors blocks, plain window sills, fillets etc upto floor V level, including curing but excluding the cost of centring, shuttering and finishing with 1:3:6 (1 cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size)	8.000	Cum	7269.185	58153.48
18	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20 cm in depth, consolidating each deposited layer by ramming and watering, lead upto 50 m and lift upto 1.5 m.	291.650	Cum	198.700	57950.86
19	Carriage of pipes from Divisional store Qazigund upto dumping site of work by mechanical transport avg. distance 03 KMS including loading, unloading and stacking complete.				0.00
19.01	100 mm dia GI Pipe	400.000	Mtr	3.280	1312.00
19.02	40.25.20, and 15 mm dia GI Pipes	3.598	MT	133.410	480.01
20	Carriage of Different material from Source to Dumping site at road by Mechanical transport including loading ,unloading and Stacking complete				0.00

To

[Handwritten signature]

20.01	Cement & Steel for Avg. lead of 3km	3.495 c	MT	153.422 c	536.2
20.02	Sand for Avg. lead of 30 KM	3.620 c	Cum	501.653 c	1815.98
20.03	20mm Aggregate for Avg. lead of 10KM	6.210 c	Cum	280.853 c	1744.10
20.04	40mm Aggregate for Avg. lead of 10KM	98.000 c	Cum	305.279 c	29917.34
20.05	Stone solling for Avg lead of 5KM	1.630 c	Cum	242.673 c	395.56
	Total				849800.89

Quoted Percentage rate

2.00%

Above

866796.91

Alloted Cost

Rupees:- Eight Lakhs Sixty Six thousands Seven Hundred Ninety Six only

Head Draftsman

Tech. Officer

Ex. Engineer PHE Div. Qazigund

Terms & Conditions

- 1 The cost of work is restricted to Rs.866796/=(Rupees : Eight Lakhs Sixty Six thousands Seven Hundred Ninety Six only)
- 2 Earnest money deposited by you vide CDR No.3109816 dtd.18/05/22 JK Bank Qazigund is being retained as security deposit and shall be released after as per the general terms and condition of the Contract
- 3 The allotted works shall be subject to check by the third party monitoring agency (TPIQM) appointed by the Department. The agency shall check the quality of works executed by the agencies, the quality of materials used for construction and the quality of machinery installed in each scheme. The TPIQM's role shall be that of an assistant to the Employer's Representative for the purpose of monitoring and evaluating of the performance of the Contract during the Contract Period
- 4 Agency must execute the works as per the requirements/specifications detailed in the relevant/applicable IS code/s
- 5 The rates are including the charges for submission of progress, Geo tagged photographs through the professional person before , during and after construction and progress reports in both hard and soft copies .
- 6 The date of start of work shall be reckoned within one week form the date of issue of LOI / Contract Allotment whichever is earlier.
- 7 No price escalation will be paid for completion of the work within the stipulated time or extended date of completion due to any reasons whatsoever.
- 8 In case of quantity variation OR required as per the direction of the Engineer in charge , the same has to be executed at site and nothing extra will be paid beyond the overall allotted cost.
- 9 Retention many / Security deposit shall be 10% of the contract value . The security deposit is to be recovered @ of 10% of bill amount from running account bills and shall be released after completion of the work and recomandation from the concerned Engineer in charge
- 10 Liquidated damages (LD): In the event of allottee failing, declining, neglecting or delaying the supplies / works or in the event of any damage occurring or being caused by the allottee or in the event of any default or failure by the allottee in complying with any of the terms and conditions of the contract, the Department shall with or without prejudice to any other remedies available to it under any law for the time being enforce in the UT:
 - a) Terminate the contract after 15 days' notice and/or
 - b) Recover the amount of loss caused by damage, failure or default, as may be determined by the department.
 - and/or
 - c) Recover the extra cost, if any, involved in allotting contract to other party and/or
 - d) Impose Liquidated damages on account of delay beyond the schedule completion period to the tune of 0.5% of the delayed portion of contract every week but not exceeding 10% value of the contract.
 - and/or
 - e) Forfeit the performance security and blacklist the firm.


536 27
1815 96
1744 10
299 17 34
395 56
800-89

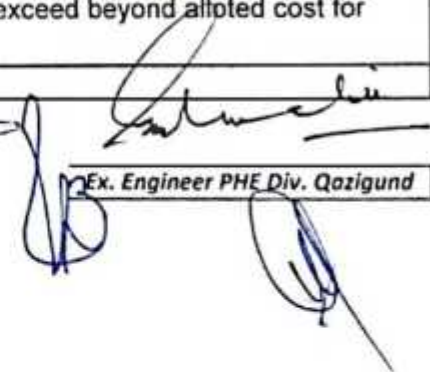
	Adequate precautions be taken for the environment and social protection and all safety practices in vogue be strictly adhered to during the execution of work.
12	No mobilization advance shall be paid.
13	The Agency shall be responsible for the time and proper setting out of all the works and for the correctness of the positions, levels, dimensions and alignment of all parts of the works and for the provision of all necessary instruments, appliances and labour in connection therewith.
14	The Agency shall make his own arrangements for the engagement of all types of the labour, required for the execution of the job. No workman below the age of 18 years shall be employed on the works. Also the bidder shall comply with the provisions of all labour laws and the rules framed there under.
15	The Agency shall at his own cost make arrangements for proper storage, especially towards Rain and Snow damages of the equipment/ materials at sites till its erection/completion. For the purpose, the bidder shall, with the approval of the Engineer in charge construct temporary storage accommodation for equipment/ material at site for which land shall be provided by the department near the site of work.
16	The Agency shall in connection with the work provide and maintain at his own cost all lights, guards, fencing and watching, when and where necessary or required by the Department for the protection of the work or safety and convenience of the Public etc
17	The Agency shall in advance communicate with incharge store keeper, of Divisional Store for lifting of pipe material etc and shall make adquate measures like avaiability of transport and labour for easy transportation from store to site against proper receipt / Challan, if required .
18	As soon as letter of award is communicated to the firm, the contract shall be complete and binding upon them, the Agency/firm shall also be required to execute an agreement with the competent authority within seven days from the date of issue of letter of award. Failure to execute such an agreement in time shall not however, prevent this contract from being enforced against the firm and the date of delivery of the material/completion of works shall be reckoned from the date of issue of the letter of award .
19	All other terms and conditions as laid down in the detailed NIT/SBD/ PWD Form No.25 double /GFR 2017/Manual for procurement of Works 2019 shall remain in force and binding upon the Agency.
20	Any rules/terms and conditions, if not stipulated in the bidding document, shall be strictly dealt in accordance with the relevant rules/guidelines stipulated in the General Finance Rules (GFR 2017) and Manual for procurement of Works 2019 Government of India.

Copy to the :-

- 1 Chairman District Jal Jevan Mission (DDC) Anantnag for information.
- 2 Superintending Engineer Hydraulic Circle Anantnag for information.
- 3 Assistant Executive Engineer Jal Shakti (PHE) Sub-Division Qazigund for information & necessary action. He will ensure the execution of work strictly in accordance with approved proposal/guidelines under JJM. The cost of work should not exceed beyond allotted cost for which he shall be personally responsible.
- 4 File concerned.


Head Draftsman


Tech. Officer


Ex. Engineer PHE Div. Qazigund