

OFFICE OF THE EXECUTIVE ENGINEER (JSD) PHE DIVISION BARAMULLA

Email: kmrphelba@gmail.com (FAX) 01952234575 (Tel) 01952234244


Allotment Order No. 34 of 2023 dated 20-07-2023

Name of the agency/ contractor	M/s. Adil Aziz Shagoo
Address	Khwajabagh Baramulla
Registration No.	SE/Hyd/Spr/CEE/Civil/242 of 2021-22
Contact/ Email	882508513
Name of work	Laying fitting of pipes for WSS Kawhaar Kaliban under JJM
References	This office ENIT 24 of 06/2023 (S.No. 05)
Accord of administrative approval No. & date	177/SE/HYD/DB/JJM of 2022-23 dated 31.01.2023
Advertised Cost	Rs. 1875511/-
Allotted Cost	Rs. 1565677/- (Rupees Fifteen Lacs Sixty Five Thousand Six Hundred Seventy Seven Only)
Time of completion	45 days

For and on behalf of Lt. Governor of Jammu and Kashmir Union Territory, the above noted work is hereby allotted to you on quoted rates given in the Annexure "A" t this allotment, on the terms and conditions given here under :

Conditions:

01. Time of completion is essence of the contract.
02. The work shall have to be started by you at site immediately & ensure its successful completion within a period of **45** days from the date of issuance of allotment from this office strictly in accordance with the approved proposals failing which the work shall have to be got executed through any other means at your risk and cost, besides CDR deposited by you as security against this contract shall be forfeited.
03. An agreement shall have to be drawn up by you with the department within a period of 07 days from the date of issuance of allotment failure to execute such a formal deed shall not however prevent the contract from being enforced upon you.
04. The allotted works shall be subject to Check by the third party monitoring agency appointed by the Department.
05. Payment shall be released as per actual / measured work done not less than 20% of the allotted cost on a monthly basis.
06. Performance security equivalent to 03% of the value of the contract shall have to be deposited by you in shape of CDR/FDR/Bank Guarantee within one week of issuance of allotment order & Valid for a period of 03 months beyond the expiry of warranty period of the contract.
07. The firm shall be bound for satisfactory performance of works for 18 months after the successful commissioning of the works. If during warranty period any malfunctioning / defects arise, you shall have to rectify the same within a period of 10 days of receipt of intimation. In case of any failure on your part, the department may get the defects removed / repaired by any other means and cost thereof shall be recovered from you and shall be recommended for further punitive action as governed under the relevant clause of the contract including black listing.
08. After testing and commissioning of works you shall have to make a trial run of the works for a period of 03 months during which you have to operate and maintain the executed works to the full satisfaction of the department.
09. The defective liability period shall be for a period of 12 months and shall commence after the successful completion of trial run.

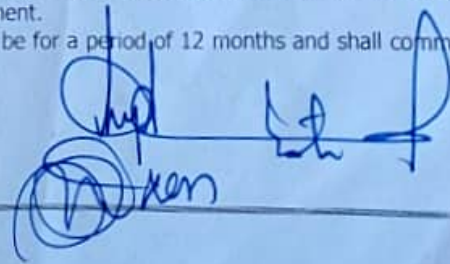


10. Pre & post Geo-tagged photographic evidence be taken during the execution of the work and shall have to be produced at the time of submission of the bill.
11. Date of start of the work within 07 days from the date of issue of this letter. However date of start for laying and fitting of pipes will start within 02 days of issuance of pipe material by the department.
12. All other terms and conditions shall be applicable as laid down in Standard bid Document & PWD form No. 25/33.
13. Any rules/ terms and conditions if no stipulated in the bidding document, shall be strictly dealt in accordance with the relevant rules/ guidelines stipulated in General Financial Rules (GFR-2017 and manual for procurement of works 2019 G.O.I).

Flanges involved (if any) shall only be used in case of extreme exigencies, like rocky terrain, gorge & where trench is not possible.

(Encl: Annexure "A")

No. 3834-46
Dt. 21-07-2023


Executive Engineer
Jal Shakti Department
PHE Division Baramulla

Copy to the :-

- 1/- Mission Director, Mission Directorate Jal Jeevan Mission J&K Civil Secretariat Srinagar/ Jammu for information.
- 2/- Chief Engineer Kashmir PHE Department Srinagar for favour of information.
- 3/- District Development Commissioner Baramulla (Chairperson DJJM) for favour information.
- 4/- Distt. Superintending Engineer Hydraulic Circle Bla/Bpr HQ Sopore (Member Secretary DJJM) for information. This is with reference to his authorization No: SE/Hyd/DB/4284-96 Dated: 15.07.2023.
- 5/- Additional District Development Commissioner Baramulla (Member DJJM) for information.
- 6/- Assistant Commissioner Development Baramulla (Member DJJM) for information.
- 7/- Divisional Forest Officer Baramulla (Member DJJM) for information.
- 8/- Chief Planning Officer Baramulla (Member DJJM) for information.
- 9/- Chief Medical Officer Baramulla (Member DJJM) for information.
- 10/- District Social Welfare Officer Baramulla/ District Tribal Welfare Officer Baramulla (Member DJJM) for information.
- 11/- District Information Officer Baramulla (Member DJJM) for information.
- 12/- Asstt. Ex. Engineer PHE Sub Division Baramulla, for information.
- 13/- File Concerned.

Comp. by: Shahid Farooq (Correspondence)

Item of work:
Laying fitting of pipes for WSS Kawhaar Kaliban under JIM


Sl.No	Description of Work / Item(s)	No. of Qty	Units	Rate	Total Amount
1	Earth work in excavation by manual means in trenches for foundations, drains, pipes, cables etc. (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides and ramming of bottoms lift upto 1.5 m, including getting out excavated earth and disposal of surplus excavated earth as directed	ℓ	ℓ	ℓ	ℓ
1.2	All Kinds of soil.	2068.500	Cum	436.000	901866.000
2	Laying and fitting of G.I. pipes (all classes) complete including cost of pipe specials and excluding cost of Pipes and Earth work.	ℓ	ℓ	ℓ	0.000
2.1	15 mm dia. nominal bore	1500.000	Mtr	20.250	30375.000
2.2	20 mm dia. nominal bore	1000.000	Mtr	20.250	20250.000
2.3	25 mm dia. nominal bore	1000.000	Mtr	30.650	30650.000
2.4	40 mm dia. nominal bore	2700.000	Mtr	40.800	110160.000
2.5	50 mm dia. nominal bore	500.000	Mtr	40.800	20400.000
3	Laying in position centrifugally cast (spun) iron S&S or flanged pipes (excluding cost of pipe) 150 mm dia D.I.	ℓ	ℓ	ℓ	154696.500
		630.0000	Qd	245.550	
4	Providing push-on-joints to Centrifugally (Spun) Cast Iron Pipes or Ductile Iron Pipes including testing of joints and including the cost of rubber gasket.	ℓ	ℓ	ℓ	0.000
4.1	100 mm dia pipes	636.000	No	89.700	57049.200
5	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20 cm in depth, consolidating each deposited layer by ramming and watering, lead upto 50 m and lift upto 1.5 m.	ℓ	ℓ	ℓ	369979.400
		1862.000	cum	198.700	
6	Making connection of G.I. distribution branch with G.I. main of following sizes by providing and fixing Tee, including cutting and threading the pipe etc. complete	ℓ	ℓ	ℓ	0.000
6.1	25 to 40 mm nominal bore	48.0000	No	666.250	31980.000
7	Manufacturing providing fixing of MS Bends/ Tees including carriage of welding machine upto site of work incl. cost of nuts, bolts, rubber washers etc., complete job.	ℓ	ℓ	ℓ	36750.000
		175.000	Kg	210.000	
8	Providing and fixing D.I. sluice valves (with cap) complete with bolts, nuts, rubber insertions etc. (the tail pieces if required will be paid separately). Confirming to IS:14846 read with latest amendments.	ℓ	ℓ	ℓ	0.000
8.1	100 mm dia. Class 1	3.000	No	13164.000	39492.000
9	Providing and fixing gun metal gate valve with C.I. wheel of approved quality (screwed end)	ℓ	ℓ	ℓ	0.000
9.1	25 mm nominal bore	18.000	No	543.850	9789.300
9.2	40 mm nominal bore	6.0000	No	704.700	4228.200
9.3	50 mm nominal bore	2.000	No	942.750	1885.500
9.4	65 mm nominal bore	3.0000	No	1568.850	4706.550
10	Providing and fixing C.I. double acting air valve of approved quality with bolts, nuts, rubber insertions etc. complete (The tail pieces, tapers etc. if required will be paid separately).	ℓ	ℓ	ℓ	0.000
10.1	50 mm dia.	4.000	No	5147.150	20588.600
11	Carriage of material from source to site of work by Mechanical Transport including loading unloading and stacking etc.	ℓ	ℓ	ℓ	0.000
11.1	Pipes (below 100mm dia) max lead 15 Km	15.220	M.ton	303.646	4621.472


[Handwritten signatures and initials]

Description of Work / Item(s)	No. of Qty	Units	Rate	Total Amount
Pipes 100mm dia D.I max lead 15 Km	3500.000	Mtr	7.441	26043.500
Total				1875511
Quoted Rate @ Below 16.52%				309834
Total Allotted Amount				1565677
(Rupees Fifteen Lacs Sixty Five Thousand Six Hundred Seventy Seven Only)				

Res & Qty checked by:


Head Draftsman




Executive Engineer
PHE Division Baramulla