

Office of the
EXECUTIVE ENGINEER (JAL SHAKTI DEPARTMENT) PHE
DIVISION BARAMULLA

Email: kmrphebla@gmail.com (FAX) 01952-234575 (Tel) 01952234244

M/S: Ghulam Hassan Bhat
S/o: Ab. Ahad Bhat
R/o: Ferozpora Rafiabad Baramulla

No: PHE/Bla/ 2445-57

Dated: 7-6-2022

Subject: Retrofitting of WSS Maqboolabad Valutra by way of Laying and fitting of Main/ Sub main/ Distribution System at various spots (for providing 100% FHTC) under JJM.

Ref: (i) Constitution of District Jal Jeevan Mission, Administrative Council Decision No: 28-04-2020 Dated: 05-02-2020 Issued vide Govt. order No: 501-JK (GAD) of 2020 Dated: 24-04-2020.
(ii) Minutes of fourth meeting of the Apex committee of Jal Jeevan Mission J&K, meeting convened on 04-09-2021.
(iii) Jal Shakti Department order No: 196 of JK (JSD) of 2021 Dated: 12-10-2021.
(iv) Chief Engineer Kashmir PHE Jal Shakti Department office E-NIT No: 129 of 2021-22 Dated: 21-02-2022 issued under Endtt. No: CE/PHE/DB/41981-42033 Dated: 21-02-2022.
(v) UT level committee meeting held on 28-04-2022 under the Chairmanship Development Commissioner Works PW (R&B).
(vi) Chief Engineer Kashmir PHE Jal Shakti Department Srinagar's office letter No: CE/PHE/JJM/2617-59 Dated: 05-05-2022 & 4169-74 dated: 20-05-2022.
(vii) Minutes of meeting of held on 23-05-2022 under the Chairpersonship of District Development Commissioner Baramulla (Chairperson District JJM Bla) authorization issued vide No: DDCB/Meeting/ 2022/1214-44 Dated: 24-05-2022.
(viii) District Superintending Engineer Hyd. Circle Bla/Bpr HQ Sopore authorization No: SE/Hyd/2105-14 dated: 04-06-2022.
(ix) Your tender received in response to this office ENIT No: 24 of 05/2022 (S. No: 07) Tender ID: 2022_PHE_170159_07.

01. Amount of work advertised :18,00,000 lacs
02. Allotted cost of work: 17, 27,672.00
(Rupees: Seventeen lac twenty seven thousand six hundred & seventy two only)

Time of completion: (45 days)

For and on behalf of Lt. Governor of Jammu and Kashmir Union Territory, the above noted work is hereby allotted to you on quoted rates given in the Annexure "A" t this allotment, on the terms and conditions given here under :


Conditions:

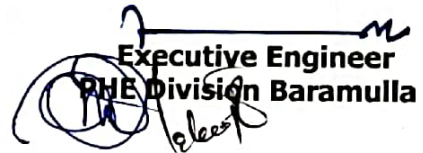
01. Time of completion is essence of the contract.
02. The work shall have to be started by you at site immediately & ensure its successful completion within a period of 45 days from the date of issuance of allotment from this office strictly in accordance with the approved proposals failing which the work shall have to be got executed through any other means at your risk and cost, besides CDR deposited by you as security against this contract shall be forfeited.
03. An agreement shall have to be drawn up by you with the department within a period of 07 days from the date of issuance of allotment failure to execute such a formal deed shall not however prevent the contract from being enforced upon you.
04. The allotted works shall be subject to Check by the third party monitoring agency appointed by the Department.
05. Payment shall be released as per actual / measured work done not less than 20% of the allotted cost on a monthly basis.

06. Performance security equivalent to 03% of the value of the contract shall have to be deposited by you in shape of CDR/FDR/Bank Guarantee within one week of issuance of allotment order & Valid for a period of 03 months beyond the expiry of warranty period of the contract.
07. The firm shall be bound for satisfactory performance of works for 18 months after the successful commissioning of the works. If during warranty period any malfunctioning / defects arise, you shall have to rectify the same within a period of 10 days of receipt of intimation. In case of any failure on your part, the department may get the defects removed / repaired by any other means and cost thereof shall be recovered from you and shall be recommended for further punitive action as governed under the relevant clause of the contract including black listing.
08. After testing and commissioning of works you shall have to make a trial run of the works for a period of 03 months during which you have to operate and maintain the executed works to the full satisfaction of the department.
09. The defective liability period shall be for a period of 12 months and shall commence after the successful completion of trial run.
10. Pre & post Geo-tagged photographic evidence be taken during the execution of the work and shall have to be produced at the time of submission of the bill.
11. Date of start of the work shall be reckoned within **07 days** from the date of issue of this letter. However date of start for laying and fitting of pipes will start within 02 days of issuance of pipe material by the department.
12. All other terms and conditions shall be applicable as laid down in Standard bid Document & PWD form No. 25/33.
13. Any rules/ terms and conditions if not stipulated in the bidding document, shall be strictly dealt in accordance with the relevant rules/ guidelines stipulated in General Financial Rules (GFR-2017) and manual for procurement of works 2019 G.O.I.

(Encl: Annexure "A")

No - 2445-57
DT - 7-6-22


Technical Officer to
Executive Engineer
PHE Division Baramulla


Executive Engineer
PHE Division Baramulla

Copy to the :-

01. Mission Director, Mission Directorate Jal Jeewan Mission J&K Civil Secretariat Srinagar/ Jammu for information.
02. Chief Engineer Kashmir PHE Department Srinagar for favour of information.
03. District Development Commissioner Baramulla (Chairperson DJJM) for favour information.
04. Distt. Superintending Engineer Hydraulic Circle Bla/Bpr HQ Sopore (Member Secretary DJJM) for information. This is with reference to his authorization No: 2105-14 Dated: 04-06-2022.
05. Additional District Development Commissioner Baramulla (Member DJJM) for information.
06. Assistant Commissioner Development Baramulla (Member DJJM) for information.
07. Divisional Forest Officer Baramulla (Member DJJM) for information.
08. Chief Planning Officer Baramulla (Member DJJM) for information.
09. Chief Medical Officer Baramulla (Member DJJM) for information.
10. District Social Welfare Officer Baramulla/ District Tribal Welfare Officer Baramulla (Member DJJM) for information.
11. District Information Officer Baramulla (Member DJJM) for information.
12. Distt. Nodal Officer Baramulla, TPIA JJM Kashmir, for information.
13. ~~File Concerned.~~ Asstt. Ex. Engineer PHE Sub Division _____ for information & n/a.

eProcurement System Government of Jammu And Kashmir

Annexure "A"

Name of Work:

retrofitting of W.S.Scheme Maqboolabad Valutra by way of :- Laying and fitting of Main /Submain /Distribution System at various spots (for providing 100% FHTC) under JJM.

Contract No: e-NIT No 24 of 05/2022 S.No 07

Tender ID: 2022_PHE_170159_7

SCHEDULE OF WORK / ITEM(S)

Sl. No	Description of Work / Item(s)	Qty.	Unit	Rate	Quoted Rate @ - 4.00%	Amount
1.00	Earth work in excavation by manual means in trenches for foundations, drains, pipes, cables etc. (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides and ramming of bottoms lift upto 1.5 m, Including getting out excavated earth and disposal of surplus excavated earth as directed:					
1.10	All Kinds of Soil	1438.7	Cum	436	418.56	602182.3
2.00	Laying and fitting of G.I. pipes (all classes) complete including cost of pipe specials and excluding cost of Pipes and Earth work.					
2.10	15 mm dia. nominal bore	1518	Mtr	20.25	19.44	29509.92
2.20	20 mm dia. nominal bore	1500	Mtr	20.25	19.44	29160
2.30	25 mm dia. nominal bore	1500	Mtr	30.65	29.424	44136
2.40	40 mm dia. nominal bore	1800	Mtr	40.8	39.168	70502.4
2.50	50 mm dia. nominal bore	1845	Mtr	40.8	39.168	72264.96
2.60	100 mm dia. nominal bore	3000	Mtr	107.7	103.392	310176
3.00	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20 cm in depth, consolidating each deposited layer by ramming and watering, lead upto 50 m and lift upto 1.5 m.	1294.8	cum	198.7	190.752	246991.4
4.00	Making connection of G.I. distribution branch with G.I. main of following sizes by providing and fixing Tee, including cutting and threading the pipe etc. complete					
4.10	25 to 40 mm nominal bore	4	No	666.25	639.6	2558.4
4.20	50 to 80 mm nominal bore	5	No	1268.75	1218	6090
5.00	Providing and fixing D.I. sluice valves (with cap) complete with bolts, nuts, rubber insertions etc. (the tail pieces if required will be paid separately). Confirming to IS:14846 read with latest amendments.					
5.10	100 mm dia.	2	No	13164	12637.44	25274.88
6.00	Providing and fixing gun metal gate valve with C.I. wheel of approved quality incl. all accessories and all carriages complete.					
6.10	25 mm nominal bore	2	No	543.85	522.096	1044.192
6.20	40 mm nominal bore	2	No	70.7	676.512	1353.024
6.30	50 mm nominal bore	4	No	942.75	905.04	3620.16
6.40	65 mm nominal bore	4	No	1568.85	1506.096	6024.384
7.00	Providing and fixing C.I. double acting air valve of approved quality with bolts, nuts, rubber insertions and other accessories complete.					
7.10	25 mm dia.	5	No	3000	2880	14400
7.20	40 mm dia.	2	No	4000	3840	7680



Contract No: e-NIT No 24 of 05/2022 S.No 07

Tender ID: 2022_PHE_170159_7

SCHEDULE OF WORK / ITEM(S)

Sl. No	Description of Work / Item(s)	Qty.	Unit	Rate	Quoted Rate @ - 4.00%	Amount
8.00	Providing and fixing of MS surface boxes (0.75x0.75x0.75) of 6mm thick plate for sluice valves. The job includes fixing of angle iron frame legs in cement concrete 1:2:4 mix with locking arrangements complete.	6	Job	7000	6720	40320
9.00	Manufacturing providing fixing of MS Bends/ Tees including charges of welding machine upto site of work incl. cost of nuts, bolts, rubber washers etc., complete job.	10	Kg	210	201.6	2016
10.00	Providing fixing of 10 to 12mm thick flanges to existing G.I pipes incl. cost of rubber washers, nuts, bolts and including carriage of welding machine & gen set involving welding at site as per the ground profile complete job.					
10.10	100mm dia G.I	150	Pair	1200	1152	172800
11.00	carriage of material from source to site of work by Mechanical Transport including loading unloading and stacking etc.					
11.10	Pipes (below 100mm dia) for 30 Kms	19.55	M.Ton	445.959	428.1206	8369.759
11.20	100mm dia G.I Pipes for 30 Kms	3000	Mtr	10.833	10.39968	31199.04
Total						1727673
(Rupees Seventeen Lacs Twenty Seven Thousand Six Hundred Seventy Three Only)						

Rates and Quantity Checked By


Head Drafts Man


Technical Officer


Executive Engineer
PHE Division Baramulla