

# OFFICE OF THE EXECUTIVE ENGINEER (JSD) PHE DIVISION

## BARAMULLA

Email: kmphebla@gmail.com (FAX) 01952234575 (Tel) 01952234244



Allotment Order No. **27 of 2023**

Dated: **27-04-2023**

Name of the agency/ contractor	<b>Mohd. Saleem Shan</b>
Address	<b>Banihal Doda</b>
Registration No.	<b>SEK/PS/2022-23/ BEE/144</b>
Contact/ Email	<a href="mailto:rameshwar931@gmail.com">rameshwar931@gmail.com</a>
Name of work	Retrofitting of WSS Kanloo by way of Laying and fitting of Main/Sub Main/ Distribution system at various spots, Spring Protection Work, Surface drain ( for providing 100% FHTC) under JJM
References	<b>This office ENIT 84 of 03/2023 (S. No. 02)</b>
Accord of administrative approval No. & date	<b>168/SE/HYD/DB/JJM of 2022-23 Dated: 31-01-2023</b>
Advertised Cost	<b>Rs. 30.25 lacs</b>
Allotted Cost	<b>Rs. 29,49,635/-</b> (Rupees Twenty nine lac forty nine thousand six hundred and thirty five only)
Time of completion	<b>60 days</b>

For and on behalf of Lt. Governor of Jammu and Kashmir Union Territory, the above noted work is hereby allotted to you on quoted rates given in the Annexure "A" t this allotment, on the terms and conditions given here under :

### Conditions:

01. Time of completion is essence of the contract.
02. The work shall have to be started by you at site immediately & ensure its successful completion within a period of **60** days from the date of issuance of allotment from this office strictly in accordance with the approved proposals failing which the work shall have to be got executed through any other means at your risk and cost, besides CDR deposited by you as security against this contract shall be forfeited.
03. An agreement shall have to be drawn up by you with the department within a period of 07 days from the date of issuance of allotment failure to execute such a formal deed shall not however prevent the contract from being enforced upon you.
04. The allotted works shall be subject to Check by the third party monitoring agency appointed by the Department.
05. Payment shall be released as per actual / measured work done not less than 20% of the allotted cost on a monthly basis.
06. Performance security equivalent to 03% of the value of the contract shall have to be deposited by you in shape of CDR/FDR/Bank Guarantee within one week of issuance of allotment order & Valid for a period of 03 months beyond the expiry of warranty period of the contract.
07. The firm shall be bound for satisfactory performance of works for 18 months after the successful commissioning of the works. If during warranty period any malfunctioning / defects arise, you shall have to rectify the same within a period of 10 days of receipt of intimation. In case of any failure on your part, the department may get the defects removed

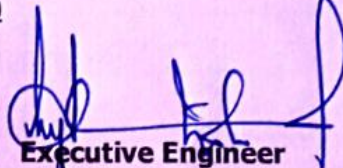
*(Handwritten signatures and initials)*

- / repaired by any other means and cost thereof shall be recovered from you and shall be recommended for further punitive action as governed under the relevant clause of the contract including black listing.
08. After testing and commissioning of works you shall have to make a trial run of the works for a period of 03 months during which you have to operate and maintain the executed works to the full satisfaction of the department.
  09. The defective liability period shall be for a period of 12 months and shall commence after the successful completion of trial run.
  10. Pre & post Geo-tagged photographic evidence be taken during the execution of the work and shall have to be produced at the time of submission of the bill.
  11. Date of start of the work within 07 days from the date of issue of this letter. However date of start for laying and fitting of pipes will start within 02 days of issuance of pipe material by the department.
  12. All other terms and conditions shall be applicable as laid down in Standard bid Document & PWD form No. 25/33.
  13. Any rules/ terms and conditions if no stipulated in the bidding document, shall be strictly dealt in accordance with the relevant rules/ guidelines stipulated in General Financial Rules (GFR-2017 and manual for procurement of works 2019 G.O.I).

**Flanges involved (if any) shall only be used in case of extreme exigencies, like rocky terrain, gorge & where trench is not possible.**

**(Encl: Annexure "A")**

No. 1041-53  
Dt. 28-04-2023

  
Executive Engineer  
Jal Shakti Department  
PHE Division Baramulla

**Copy to the :-**

- 1/- Mission Director, Mission Directorate Jal Jeevan Mission J&K Civil Secretariat Srianagar/ Jammu for information.
- 2/- Chief Engineer Kashmir PHE Department Srinagar for favour of information.
- 3/- District Development Commissioner Baramulla (Chairperson DJJM) for favour of information.
- 4/- Distt. Superintending Engineer Hydraulic Circle Bla/Bpr HQ Sopore (Member Secretary DJJM) for information. This is with reference to his authorization No: 516-28 Dated: 15-04-2023.
- 5/- Additional District Development Commissioner Baramulla (Member DJJM) for information.
- 6/- Assistant Commissioner Development Baramulla (Member DJJM) for information.
- 7/- Divisional Forest Officer Baramulla (Member DJJM) for information.
- 8/- Chief Planning Officer Baramulla (Member DJJM) for information.
- 9/- Chief Medical Officer Baramulla (Member DJJM) for information.
- 10/- District Social Welfare Officer Baramulla/ District Tribal Welfare Officer Baramulla (Member DJJM) for information.
- 11/- District Information Officer Baramulla (Member DJJM) for information.
- 12/- Asstt. Ex. Engineer PHE Sub Division Pattan, for information.
- 13/- File Concerned.

## Annexure "A"

Work:


of W.S.Scheme Mongam Wagoora by way of :- Laying and fitting of Main /Submain /Distribution System at various spots, ChainLink Fencing around PST and Constt. of R.C.C Pre Settling Tank (for providing 100% FHTC) under JJM

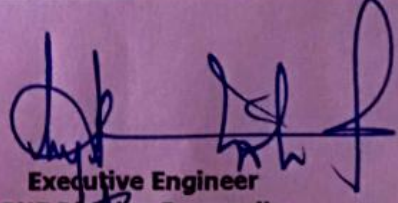
	Description of Work / Item(s)	No.of Qty	Units	Rate	Total Amount
	Earth work in excavation by manual means in trenches for foundations, drains, pipes, cables etc. (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides and ramming of bottoms lift upto 1.5 m, including getting out excavated earth and disposal of surplus excavated earth as directed:				
1.1	For all Kind of soils	1561.200	CUM	436.000	680683.200
2	Laying and fitting of G.I. pipes (all classes) complete including cost of pipe specials and excluding cost of Pipes and Earth work.				0.000
2.1	100mm dia G.I Pipes	100.000	Mtr	107.700	10770.000
2.2	80mm dia G.I Pipes	1300.000	Mtr	73.050	94965.000
2.3	65mm dia G.I Pipes	800.000	Mtr	73.050	58440.000
2.4	50mm dia G.I Pipes	900.000	Mtr	40.800	36720.000
2.5	40mm dia G.I Pipes	800.000	Mtr	40.800	32640.000
2.6	25 mm dia G.I Pipes	900.000	Mtr	30.650	27585.000
2.7	20mm dia G.I Pipes	1100.000	Mtr	20.250	22275.000
2.8	15mm dia G.I Pipes	480.000	Mtr	20.250	9720.000
3	Filling available excavated earth( excluding rock) in trenches, plinths,sides of foundation etc in layers not exceeding 20 in cm depth , consolidating each deposited layer by ramming and watering lead upto 50m and lift upto 1.5m	1183.950	CUM	198.700	235250.865
4	Making of connections of G.I distrubtion Branches with G.I mains by providing fixing tee, etc including cutting and threading of pipes testing of joints complete job				0.000
4.1	50 to 40mm dia G.I Pipes	10.000	No	1268.800	12688.000
4.2	25 to 40mm dia G.I Pipes	10.000	No	666.300	6663.000
4.3	50 to 100mm dia G.I pipes	8.000	No	1100.000	8800.000
5	P/F of MS bendsand TEEs includings carriage of welding machines upto site of work and fixing at site includings all accessories testing of joints complete job	20.000	kg	210.000	4200.000
6	P/F MS surface boxes (0.75*0.75*0.75)6mm thick plates for housing of 100/80 dia GV/SVs .The job includes fixings of 40*40*6mm angle iron frame with legs to be grouted incement concrete mix of 1:2:4 mix cement concrete with proper locking arrangements and handle arrangements	8.000	No	7000.000	56000.000
7	Providing and fixing C.I. double acting air valve of approved quality with bolts, nuts, rubber insertions etc. complete (The tail pieces, tapers etc. if required will be paid separately)	10.000	No	5147.150	51471.500
8	Providing and laying hand packed stone soling 50 mm nominal size including filling, spreading, dressing, ramming, all leads lifts and all carriages complete.	21.430	CUM	1320.000	28287.600
9	P/L in position of cement concrete (1:4:8) excluding cost of centring shuttering	21.430	CUM	4861.109	104173.566
10	Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centring and shuttering. All work upto plinth level with: (1 cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size)	21.600	CUM	5437.740	117455.184
11	P/L in position Reinforced cement concrete (1:1.5:3)excluding cost of centring shuttering	56.655	CUM	9408.135	533017.888

Handwritten signatures and initials at the bottom right of the page.

	Description of Work / Item(s)	No. of Qty	Units	Rate	Total Amount
	in position Reinforced cement concrete (1:2:4) excluding cost of centring shuttering	2.950	CUM	6978.730	20587.254
	Centring and shuttering including strutting, propping etc and removal of form work	315.600	sqm	262.300	82781.880
	Foundations, footings, bases for columns	16.000	sqm	573.900	9182.400
	Retaining walls, return walls, walls (any thickness) including attached pilasters buttresses, plinth and string course fillets, kerbs and steps etc.	231.000	Kg	87.175	20137.425
	Reinforcement for RCC work including straightening, cutting, Bending, Placing in position T.M.T bars	2100.000	kg	102.135	214483.500
15	Structural steel work in built up sections, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete welded	685.110	kg	105.765	72460.659
16	Structural steel work in built up sections, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete. Riveted and bolted	148.000	sqm	733.500	108558.000
17	P/F of GI chain link fencing made of 4mm dia wire of required width 50*50mm including cost of nuts and bolts, washers as required at site	195.200	sqm	52.800	10306.560
18	Applying priming coat with ready mixed red oxide Zinc chromate primer of approved brand and manufacture on steel /iron/steel work	115.200	sqm	122.000	14054.400
19	Painting with synthetic enamel paint of approved brand and manufacture to give an even shade ( two or more coats on new work)	378.000	sqm	260.050	98298.900
20	12mm cement plaster of mix(1:4)	1200.000	No	30.000	36000.000
21	Filling empty cement bags including cost of empty bags	1.000	No	6250.000	6250.000
22	P/F of MS Lid cover with 50*50*6mm angle iron frame including walling and free with extracting steel wire and fixing of grills	600.000	KL	155.550	93330.000
23	Pumping out water caused by springs, tidal or river seepage, broken water mains or drains and the like.				0.000
24	Carriage of materials by mechanical vehicles 35 kms average distance	34.070	MT	473.283	16124.752
24.1	cement	0.230	MT	473.283	108.855
24.2	steel	24.450	MT	490.119	11983.410
24.3	Carriage of pipes for 35 kms	21.430	CUM	491.292	10528.388
24.4	stone soiling for 25km	50.700	CUM	451.950	22913.865
24.5	sand for 25km	73.070	CUM	491.292	35898.706
24.6	stone aggregate 20mm for 25 Km	19.280	CUM	491.292	9472.110
24.7	40mm stone aggregate for 25 Km				
<b>Total</b>					<b>3025267</b>
Quoted Rate @ Below 2.5%					<b>75632</b>
<b>Total Allotted Amount</b>					<b>2949635</b>
(Rupees Twenty Nine Lacs Forty Nine Thousand Six Hundred Thirty Five Only)					

Rates & Qty checked by:

  
Head Draftsman

  
Executive Engineer  
PHE Division Baramulla