

M/S:- Tariq Mohd Mir  
S/o:- Gh .Mohd Mir  
R/o:- Gulabbagh Pattermulla Ganderbal  
GST No:- 01CBGPM5024B1ZF  
Regd No: CE/UEED/AAY/Civil/11/2017-18.

Advertised Amount: ₹156.023lac  
Allotted Amount:- ₹1,55,63,297.00  
Major Head:-4215-JJM  
Time of completion: 90days

**{ORDER No: 31 /SE/HYD/SPR/JJM of 2022-23}**

**Dated: - 25-02-2023.**

**Subject: Fixation of Contract for:**

**Construction including successful testing and commissioning of 0.50 lac Gallon Capacity RCC service reservoir with sluice chamber, Laying / Fitting including Improvements of pipe network, Construction of bathroom, protection wall, chain link fencing , Anchor/ saddle blocks , intake/ collection chamber, & crate protection works at head site for WSS Chuntimulla Gujjarpatti. (Tender Id: 2022\_IFC\_190841\_2.)**

**Reference:**

1. Executive Engineer PHE Hydraulic Division Bandipora's e-NIT No 35/PHE/HYD/BPR of 2022-23 dated: 01-10-2022 issued under endorsement No: PHE/HYD/BPR/5678-88 dated 01-10-2022.
2. Revised District Action Plan (DAP) approved by the Chairman DJJM Bandipora circulated vide No: DDCB/BPR/2022/2056 Dated: 16-07-2022
3. Minutes of Meeting held with District Development Commissioner Bandipora (Chairman DDJM) on 23-08-2022 minutes issued vide order No. 48-DDCB OF 2023 Dated: 03-02-2023, under endorsement No. DDCB/JJM/2022-23/6132-35 Dated: 03/02/2023.
4. Administrative Approval Accorded by Chief Engineer Jal Shakti (PHE) Department Kashmir vide Order No: CE/PHE/DB/JJM/288 of 09-2022 Dated: - 22-09-2022.
5. Technical Sanction issued by Chief Engineer Jal Shakti (PHE) Department Kashmir's Order No:- CE/PHE/DB/730 of 11/2022 Dated: 15-11-2022.
6. Minutes of Meeting of District Contract Committee circulated vide No: SE/Hyd/JJM/13409-22 dated: 27-01-2023.
7. Amendment in operational guidelines for the implementation of Jal Jeevan Mission issued by NJJM, DDW&S ministry of Jal Shakti GOI vide F. No W-11016/10/2022-JJM-IV-DDWS Dated:- 21-06-2022.
8. Modus operandi communicated by Chief Engineer PHE Kashmir Vide circular No CE/PHE/MC/DB/13745-83 Dated: - 26-07-2022.

**Dear Sir,**

For and on behalf of Lieutenant Governor of Union Territory of Jammu and Kashmir, the contract for above subject work is hereby fixed on the rates quoted and subsequently negotiated and accepted by you on Percentage rate basis as per the **Annexure "A"** of this allotment order with standard terms and conditions as laid down in the **Annexure "B"** of this allotment Order. The total cost of work shall be **₹1,55,63,297.00 (One Crore Fifty Five lac Sixty Three Thousand Two Hundred and Ninety Seven Only).**

No:- SE/HYD/JJM/ 15315-29.  
Dated:- 25/02/2023

**Superintending Engineer**  
**Hydraulic Circle Baramulla/Bandipora**  
**H.Q Sopore**

**Copy to the:-**

1. Chief Engineer Kmr. Jal Shakti (PHE) Department Srinagar for favour information.
2. District Development Commissioner Bandipora(Chairman DJJM) for favour of information.
3. Additional District Development Commissioner Bandipora(Member DJJM) for information.
4. Assistant Commissioner Development Bandipora(Member DJJM) for information.
5. Divisional Forest officer Bandipora(Member DJJM) for information.
6. Chief Planning Officer Bandipora(Member DJJM) for information.
7. Chief Medical Officer Bandipora(Member DJJM) for information.
8. Chief Educational Officer Bandipora(Member DJJM) for information.
9. District Social Welfare Officer Bandipora/District Tribal Welfare Officer Bandipora(Member DJJM) for information.
10. District Information officer Bandipora(Member DJJM) for information.
11. Executive Engineer PHE Hydraulic Division Bandipora (Member DJJM) for information and necessary action.
12. Executive Engineer Jal Shakti PHE Mech. Division North Sopore (Member DJJM) for information.
13. Executive Engineer Ground Water Division Srinagar (Member DJJM) for information.
14. WAPCOS Limited Bandipora for information and necessary action.
15. File Concerned.

ction including successful testing and commissioning of 0.50 lac Gallon Capacity RCC service  
 voir with sluice chamber, Laying / Fitting including Improvements of pipe network, Construction  
 throom, protection wall, chain link fencing , Anchor/ saddle blocks , intake/ collection chamber,  
 grate protection works at head site for WSS Chuntimulla Gujjarpatti.  
 Order Id: 2022\_IFC\_190841\_2.

Annexure "A" with Order No: SE/HYD//JM of 2022-23 Dated :- -2023.

S.No	Item Description	Units	Qty	Alloted Rate	Amount
1	Earth work in excavation by manual means in trenches for foundations, drains, pipes, cables etc. (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides and ramming of bottoms lift upto 1.5 m, including getting out excavated earth and disposal of surplus excavated earth as directed: All kinds of soil	Cum	2816.86	₹ 434.91	₹ 12,25,079.71
1.1	Ordinary Rock	Cum	1174.99	₹ 965.43	₹ 11,34,372.97
2	Earth work in bulk excavation by manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 m2 on plan) including disposal of excavated earth lead upto 50 meters and lift upto 1.5 m, as directed by Engineer-in-Charge. All kinds of soil	Cum	4.71	₹ 538.00	₹ 2,533.99
2.1	Ordinary or hard rock	Cum	2.02	₹ 853.51	₹ 1,724.09
3	Earth work in bulk excavation by mechanical means (hydraulic excavator) over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 m2 on plan) including disposal of excavated earth lead upto 50 meters and lift upto 1.5 m, as directed by Engineer-in-Charge All kinds of soil	Cum	555.16	₹ 188.28	₹ 1,04,524.48
3.1	Ordinary Rock	Cum	237.94	₹ 377.40	₹ 89,798.03
4	Earth work in excavation by mechanical means (hydraulic excavator) in trenches for foundations, drains, pipes, cables etc. (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides and ramming of bottoms lift upto 1.5 m, including getting out excavated earth and disposal of surplus excavated earth as directed, within a lead of 50 metres: All Kinds of Soil	Cum	400.80	₹ 251.42	₹ 1,00,769.09
4.1	Ordinary or hard rock	Cum	7.53	₹ 468.83	₹ 3,530.25
5	Extra for every additional lift of 1.5 m or part thereof in excavation/banking excavated or stacked material : All kinds of soil :	Cum	13.39	₹ 81.45	₹ 1,090.56
5.1	Ordinary or hard rock	Cum	120.48	₹ 146.08	₹ 17,600.19
6	Laying in position centrifugally cast (spun) iron S&S or flanged pipes (excluding cost of pipe)	Qtl	2909.70	₹ 244.94	₹ 7,12,690.64
7	Providing push-on-joints to Centrifugally (Spun) Cast Iron Pipes or Ductile Iron Pipes including testing of joints and including the cost of rubber gasket. 200 mm dia D.I	No	1636.00	₹ 212.47	₹ 3,47,596.83
8	Dismantling G.I. pipes (external work) including excavation and refilling trenches after taking out the pipes, manually/by mechanical means including stacking of pipes within 50 meters lead as per direction of Engineer-in-charge : 15 mm to 40 mm nominal bore	mtr	1500.00	₹ 99.50	₹ 1,49,250.94
8.1	Above 40 mm nominal bore	mtr	1500.00	₹ 110.37	₹ 1,65,560.06
9	Laying and fitting of G.I. pipes (all classes) complete excluding cost of pipes, fittings and Earth work:- 50mm dia G.I pipe	mtr	800.00	₹ 40.70	₹ 32,558.40
9.1	40mm dia G.I pipe	mtr	2780.00	₹ 40.70	₹ 1,13,140.44
9.2	25mm dia G.I pipe	mtr	3830.00	₹ 30.57	₹ 1,17,096.03
9.3	20mm dia G.I pipe	mtr	4470.00	₹ 20.20	₹ 90,291.21
9.4	15mm dia G.I pipe	mtr	6000.00	₹ 20.20	₹ 1,21,196.25
10	Providing and fixing of 12mm thick M.S flanges G.I pipe incld. Cost of flanges rubber gaskets, nuts bolts, welding charges cutting of threads exclud Earth work and refilling: 100mm dia	joints	5.00	₹ 1,197.00	₹ 5,985.00

Head Draftsman

Superintending Engineer

uction including successful testing and commissioning of 0.50 lac Gallon Capacity RCC service  
 voir with sluice chamber, Laying / Fitting including Improvements of pipe network, Construction  
 athroom, protection wall, chain link fencing , Anchor/ saddle blocks , intake/ collection chamber,  
 crate protection works at head site for WSS Chuntimulla Gujjarpatti.  
 tender Id: 2022\_IFC\_190841\_2.

Annexure "A" with Order No: SE/HYD/JJM of 2022-23 Dated :- - -2023.

S.No	Item Description	Units	Qty	Alloted Rate	Amount
10.1	80mm dia (dismantaled pipe=800mtr)	joints	133.00	₹ 997.50	₹ 1,32,667.50
10.2	65 mm dia	joints	150.00	₹ 798.00	₹ 1,19,700.00
11	Providing and fixing C.I. double acting air valve of approved quality with bolts, nuts, rubber insertions incld. Tailpeices ,tapers, Gi pipe etc. complete 50mm dia	No	10.00	₹ 9,975.00	₹ 99,750.00
11.1	25mm dia	No	5.00	₹ 6,982.50	₹ 34,912.50
12	Providing and fixing of CI sluice valve with cap including all accessories like nuts, bolts rubber insertion etc and tail pieces of Kirloskar make including successful testing and commissioning. 200 mm dia	No	5.00	₹ 64,837.50	₹ 3,24,187.50
12.1	100mm dia	No	2.00	₹ 44,887.50	₹ 89,775.00
12.2	80mm dia	No	2.00	₹ 29,925.00	₹ 59,850.00
12.3	65mm dia	No	4.00	₹ 24,937.50	₹ 99,750.00
13	Making connection of G.I. distribution branch with G.I. main of following sizes by providing and fixing Tee, including cutting and threading the pipe etc. complete 25 to 40 mm nominal bore	Nos	50.00	₹ 664.58	₹ 33,229.22
13.1	50 to 80 mm nominal bore	Nos	10.00	₹ 1,265.58	₹ 12,655.78
14	Providing and fixing gun metal gate valve with C.I. wheel of approved quality (screwed end) 50 mm nominal bore	No	8.00	₹ 1,995.00	₹ 15,960.00
14.1	65 mm nominal bore	No	7.00	₹ 2,493.75	₹ 17,456.25
15	Constructing masonry Chamber of specified size, in brick work with common burnt clay (non modular) bricks of class designation 7.5 incement mortar 1:4 (1cement :4 coarse sand) and R.C.C. top slab 1:1.5:3mix (1 cement : 1.5 coarse sand : 3 graded stone aggregate 20 mmmnominal size ) including necessary xcavation, foundation concrete1:5:10 (1 cement :5 fine sand : 10 graded stone aggregate 40 mmmnominal size) and inside plastering with cement mortar 1:3 (1 cement : 3 coarse sand) 12 mm thick finished with a floating coat of neat cement complete as per standard design. For sluice valve, with C.I. surface box 100 mm top diameter, 160 mm bottom diameter and 180 mm deep (inside) with chained lid. Chamber 120x120x100 cm	No	1.00	₹ 21,409.19	₹ 21,409.19
16	Dumping stone including cost of stones. in Horizontal on level	Cum	220.65	₹ 614.86	₹ 1,35,668.64
17	Hand-packing stones in wire-crates; including cost of stones but excluding cost of crates	Cum	58.32	₹ 735.61	₹ 42,900.56
18	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20 cm in depth, consolidating each deposited layer by ramming and watering, lead upto 50 m and lift upto 1.5 m	Cum	4766.87	₹ 198.20	₹ 9,44,809.13
19	Providing & laying stone soling in horizontal on level.	Cum	49.89	₹ 814.36	₹ 40,628.37
20	Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centring and shuttering. All work upto plinth level with: 1:4:8 (1 cement : 4 coarse sand : 8 graded stone aggregate 40 mm nominal size)	Cum	39.54	₹ 4,849.69	₹ 1,91,756.56
21	Providing and laying in position specified grade of reinforced cement concrete including curing but excluding the cost of centering, shuttering, finishing and reinforcement. All works upto plinth level:1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	Cum	35.24	₹ 7,781.26	₹ 2,74,211.54

  
Head Draftsman


  
Superintending Engineer

including successful testing and commissioning of 0.50 lac Gallon Capacity RCC service tank with sluice chamber, Laying / Fitting including improvements of pipe network, Construction of manhole, protection wall, chain link fencing, Anchor/ saddle blocks, intake/ collection chamber, gate protection works at head site for WSS Chuntimulla Gujjarpatl.  
Order Id: 2022 HFC 190841 2.

Annexure "A" with Order No: SE/HYD/JJM of 2022-23 Dated :- -2023.

S. No	Item Description	Units	Qty	Alloted Rate	Amount
22	Reinforced cement concrete work in walls (any thickness) including attached pilasters, buttresses, plinth and string courses, fillets, columns, pillars, piers, abutments, posts and struts upto five level including curing but excluding cost of centering, shuttering, finishing and reinforcement. 1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	Cum	29.78	₹ 9,384.62	₹ 2,79,473.97
23	Reinforced cement concrete work in beams, suspended floors, roofs having slope upto 15°, landings, balconies, shelves, chajjas, lintels, bands, plain window sills, staircases and spiral stair cases upto five level including curing but excluding the cost of centering, shuttering, finishing and reinforcement with 1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	Cum	9.26	₹ 9,824.73	₹ 90,878.72
24	Reinforced cement concrete work in arches, archribs, domes, vaults shells, folded plate and roofs having slope more than 15° upto floor five level level including curing but excluding the cost of centering, shuttering finishing and reinforcement with:- 1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	Cum	11.81	₹ 10,378.51	₹ 1,22,570.19
25	Providing & fixing of main hole cover 0.75 x 0.75 mtr of standard quality with angle iron frame incld all necessary fittings complete	No	1.00	₹ 3,491.25	₹ 3,491.25
26	Providing & fixing of main hole cover 0.90 x 0.90 mtr of standard quality with angle iron frame incld all necessary fittings complete	No	3.00	₹ 4,488.75	₹ 13,466.25
27	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level: Thermo- Mechanically Treated bars of grade Fe-500D or more	kg	11025.48	₹ 86.96	₹ 9,58,798.34
28	Structural steel work in built up sections, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete Welded	kg	410.60	₹ 101.88	₹ 41,823.65
29	Structural steel work in single section, fixed with or without connecting plate, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete	kg	3873.00	₹ 90.80	₹ 3,51,677.79
30	Centering and shuttering including strutting, propping etc. and removal of form for: Foundations, footings, bases of columns etc. for mass concrete.	sqm	566.61	₹ 261.64	₹ 1,48,250.25
30.01	Walls (any thickness) including attached pilasters, buttresses, plinth and string courses etc.	sqm	1076.50	₹ 572.42	₹ 6,16,205.15
30.02	Suspended floors, roofs, landings, balconies and access platforms	sqm	10.87	₹ 634.01	₹ 6,891.70
30.03	Lintel, beams, plinth beams, girders, bressumers and cantilevers	sqm	27.49	₹ 501.59	₹ 13,788.79
30.04	Arches, domes, vaults upto 6 m span	sqm	95.03	₹ 2,081.58	₹ 1,97,812.83
30.05	Extra for shuttering in circular work: Walls	sqm	205.70	₹ 114.47	₹ 23,547.12
30.06	Extra for shuttering in circular work: foundation	sqm	13.25	₹ 52.33	₹ 693.36
30.07	Extra for shuttering in circular work: BEAMS	sqm	27.49	₹ 100.32	₹ 2,757.76
30.08	Extra for shuttering in circular work: DOMES	sqm	95.03	₹ 1,005.93	₹ 95,593.42
30.09	Edges of slabs and breaks in floors and walls : Under 20 cm wide	Rm	35.73	₹ 241.69	₹ 8,635.74
30.10	Columns, pillars, piers, abutments, posts and struts.	sqm	8.64	₹ 678.45	₹ 5,861.80
31	Providing and fixing of 50mm dia G.I half bend of standard quality to be fixed in dome for aeration purpose	No	55.00	₹ 249.38	₹ 13,715.63
32	Providing and incorporating PGI sheets strips 0.8mm thick at construction joints incld. All carriages complete job	Sqm	8.30	₹ 399.00	₹ 3,311.70

  
Head Draftsman

  
Superintending Engineer

action including successful testing and commissioning of 0.50 lac Gallon Capacity RCC service  
 poir with sluice chamber, Laying / Fitting Including Improvements of pipe network, Construction  
 throom, protection wall, chain link fencing , Anchor/ saddle blocks , intake/ collection chamber,  
 rate protection works at head site for WSS Chuntimulla Gujjarpatti.  
 tender Id: 2022\_IFC\_190841\_2.

Annexure "A" with Order No: SE/HYD/JJM of 2022-23 Dated :- - -2023.

S. No	Item Description	Units	Qty	Alloted Rate	Amount
33	Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centring and shuttering. All work upto plinth level with: 1:3:6 (1 cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size)	Cum	74.25	₹ 5,424.15	₹ 4,02,742.81
34	12mm Cement plaster finished with a floating coat of neat cement of mix:1:3 (1 cement 3 sand)	sqm	97.20	₹ 342.89	₹ 33,328.97
35	Providing and fixing G.I. chain link fabric fencing of required width in mesh size 50x50 mm including strengthening with 2 mm dia wire or nuts, bolts and washers as required complete as per the direction of Engineer-in-charge. Made of G.I. wire of dia 4 mm	sqm	297.00	₹ 731.67	₹ 2,17,304.88
36	12mm Cement plaster of mix: 1 : 4 ( 1 cement : 4 fine sand)	sqm	1052.76	₹ 259.40	₹ 2,73,085.81
37	Providing and laying in position specified grade of reinforced cement concrete including curing but excluding the cost of centering, shuttering, finishing and reinforcement. All works upto plinth level: 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size)	Cum	23.52	₹ 6,961.23	₹ 1,63,728.21
38	Providing and laying cement concrete in retaining walls, return walls, walls (any thickness)including attached pilasters, columns, piers, abutments, pillars, posts, struts, buttresses.string or lacing courses, parapets, coping, bed blocks, anchors blocks, plain window sills, fillets etc upto floor V level, including curing but excluding the cost of centring, shutteringand finishing with 1:3:6 (1 cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size)	Cum	197.40	₹ 7,251.02	₹ 14,31,350.76
39	Supply and filling GSB (granular sub-base) in layer not exceeding 22cm in thickness & aggregate size does not exceed 90mm incld. carriage	Cum	3.11	₹ 648.38	₹ 2,016.45
40	Providing & laying damp-proof Course 40 mm thick with cement concrete 1:2:4 (1 cement:2 coarse sand: 4 graded stone agg 12.5 mm nominal size) and curing complete	sqm	3.97	₹ 340.76	₹ 1,352.80
41	Brick work with common burnt clay (non-modular) bricks of class designation 7.5 in foundation and plinth including curing in :Cement mortar 1:4 ( 1 cement : 4 coarse sand)	Cum	5.77	₹ 7,133.44	₹ 41,159.96
42	Extra for brick work with common burnt clay bricks/cement concrete bricks in superstructure above plinth level upto floor five level	Cum	5.77	₹ 1,452.38	₹ 8,380.23
43	Cement concrete flooring 1:2:4 (1cement: 2 coarse sand: 4 graded stone aggregate) finished with a floating coat of neat cement including cement slurry and curing complete, but excluding the cost of nosing of steps etc. complete. 50 mm thick with 20mm nominal size stone aggregate	sqm	5.23	₹ 554.11	₹ 2,898.00
44	Providing wood work in frames of doors, windows, clerestory windows and other frames, wrought framed and fixed in position with hold fast lugs or with dash fasteners of required dia and length hold fast lugs or with dash fasteners shall be paid for separately): Second class kail wood	Cum	0.21	₹ 91,835.19	₹ 19,285.39
45	Providing and fixing glazed shutters for , windows and clerestory windows fixing with butt hinges of required size with necessary screws, excluding panelling which will be paid for separately, all complete as per direction of Engineer-in-charge. (Note: -Butt hinges and necessary screws shall be paid separately). First class kail wood (35mm)	sqm	5.92	₹ 3,086.07	₹ 18,269.51
46	Providing hoisting and fixing trusses/purlins /rafters/posts/ post-plates or like components including cost of screws etc. complete Second class Kail wood	Cum	0.52	₹ 1,60,709.02	₹ 83,568.69

  
Head Draftsman

  
Superintending Engineer

action including successful testing and commissioning of 0.50 lac Gallon Capacity RCC service  
 air with sluice chamber, Laying / Fitting including Improvements of pipe network, Construction  
 through, protection wall, chain link fencing , Anchor/ saddle blocks , intake/ collection chamber,  
 rate protection works at head site for WSS Chuntimulla Gujjarpatti.  
 Order Id: 2022\_IFC\_190841\_2.

Annexure "A" with Order No: SE/HYD/JJM of 2022-23 Dated :- - -2023.

S. No	Item Description	Units	Qty	Alloted Rate	Amount
47	Providing corrugated G. S. sheet roofing including vertical/curved surface fixed with polymer coated J or L hooks, bolts and nuts 8mm diameter with bitumen and G.I limpet washers or with G.I. limpet washers filled with white lead, including a coat of approved steel primer and two coats of approved paint on overlapping of sheets complete (upto any pitch in horizontal/vertical) or curved surface)excluding the cost of purlins, rafters and trusses and including cutting to size and shape wherever required. 0.63 mm thick with zinc coating not less than 275 gram/m2	sqm	18.12	₹ 949.42	₹ 17,203.50
48	Providing & fixing colour corrugated ridges or hips of width 60cm overall width plain G.S. sheets fixed with polymer coated J. or L hooks, bolts and nuts 8mm dia G.I. limpet and bitumen washers complete. 0.63 mm thick with zinc coating not less than 275 gram/m2	Rm	12.19	₹ 689.62	₹ 8,406.49
49	Providing and fixing plained eaves boarding (Kail wood). 250x32 mm (nominal size )	Rm	21.25	₹ 692.17	₹ 14,708.51
50	providing & fixing of Anchor bolts of 16mm dia 9"long	No	20.00	₹ 249.38	₹ 4,987.50
51	Providing and fixing of of Hardware items Aldrops 150mm dia	No	2.00	₹ 399.00	₹ 798.00
52	Providing and fixing aluminum tower bolts ISI marked anodized (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade with necessary screws etc. complete:	No	2.00	₹ 80.15	₹ 160.30
52.1	Tower bolt ( 150x10 mm ) long	No	5.00	₹ 57.21	₹ 286.03
53	Providing and fixing aluminum handles ISI marked anodized (anodic coating not less than grade AC 10 as per IS: 1868) transparent or dyed to required colour and shade with necessary screws etc. complete. 125mm	No	3.00	₹ 66.18	₹ 198.55
53.1	100 mm	No	4.00	₹ 52.17	₹ 208.68
53.2	Air hooks	No	4.00	₹ 44.89	₹ 179.55
54	Providing and applying white cement based putty of specified thickness, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete. ( 2 mm thick )	sqm	51.55	₹ 171.97	₹ 8,865.00
55	Providing and fixing of GI pipes complete with G.I fittings & clamps incld. cutting & making good etc complete	Rm	24.00	₹ 279.30	₹ 6,703.20
56	Providing and fixing of pvc pipes, cables with all pvc fittings incld. trenching and refilling etc (external with flateral 100mm dia pvc pipe) along with bends, sockets etc (prince quality)	Rm	13.00	₹ 748.13	₹ 9,725.63
57	Applying priming coats with primer of approved brand and manufacture, having low VOC (Volatile Organic Compound) content. With ready mixed pink or grey primer on wood work (hard and soft wood) having VOC content less than 50 grams/ liter	sqm	22.01	₹ 59.35	₹ 1,306.32
58	Painting with synthetic enamel paint of approved brand and manufacture to give an even shade Two or more coats on new work	sqm	22.01	₹ 121.65	₹ 2,677.41
59	Providing & fixing White vitreous china water closet squatting pan(Indian type) along with "S" or "P" trap including dismantling of old WC seat and "S" or "P" trap at site complete with all operations including all necessary materials, labour and disposal of dismantled material i/c malba, all complete as per the direction of Engineer-in charge Long pattern W.C Pan of size 580x440 mm	No	1.00	₹ 2,971.95	₹ 2,971.95

  
Head Draftsman


  
Superintending Engineer

Construction including successful testing and commissioning of 0.50 lac Gallon Capacity RCC service reservoir with sluice chamber, Laying / Fitting including Improvements of pipe network, Construction of bathroom, protection wall, chain link fencing, Anchor/ saddle blocks, intake/ collection chamber, crate protection works at head site for WSS Chuntimulla Gujjarpatti.  
Tender Id: 2022\_IFC\_190841\_2.

Annexure "A" with Order No: SE/HYD/JJM of 2022-23 Dated :- . . -2023.

S. No	Item Description	Units	Qty	Alloted Rate	Amount
60	Providing and placing on terrace (at all floor levels) polyethylene water storage tank ISI : 12701 marked indicating the BIS License No. with cover and suitable locking arrangement and making necessary holes for inlet, outlet and overflow pipes including all associated fittings and the base support for tank [Sintex, Electroplast, Star, Lotus or equivalent having valid ISI license]	litre	500.00	₹ 7.98	₹ 3,990.00
61	Providing and fixing 1st quality ceramic glazed wall tiles conforming to IS : 15622 (thickness to be specified by the manufacturer), of approved make, in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer- in-Charge, in skirting, risers of steps and dados over 12 mm thick bed of cement mortar 1:3 ( 1 cement : 3 coarse sand) and jointing with grey cement slurry @ 3.3 kg per sqm, including pointing in white cement mixed with pigment of matching shade complete. (wall / floor tiles)	Sqm	10.40	₹ 1,158.15	₹ 12,044.73
62	Providing and fixing of electric and heating points including wiring for lightning points in 1.5 sq. mm, PVC insulated copper wire and 2.5 sq. mm PVC insulated multi strand copper wire, 6mm one way switches, 2 mm thick PVC conduit/ channel with bends, junction boxes etc 6amp S pole MCS, 10 Amp DP MCB, 2 way for housing MCB, hylan sheet with wooden box recessed in walls with accessories complete: Lighting point	No	3.00	₹ 1,147.13	₹ 3,441.38
62.1	Heating point	No	2.00	₹ 1,645.88	₹ 3,291.75
62.2	Exhaust Fan 12" x12"	No	2.00	₹ 2,493.75	₹ 4,987.50
63	Applying priming coat:- With ready mixed red oxide Zinc Chromate primer of approved brand and manufacture on steel work (second coat)	sqm	297.80	₹ 28.83	₹ 8,584.90
64	Painting with aluminum paint of approved brand and manufacture to give an even shade. Two or more coats on new work	sqm	297.80	₹ 119.10	₹ 35,468.43
65	Providing and fixing of nuts ,bolts and chips incld one end fix to anchor block	kg	220.00	₹ 79.05	₹ 17,391.41
66	Providing and fixing of PVC pipes for aeration purposes	mtr	50.00	₹ 99.75	₹ 4,987.50
67	Supply of crate mesh	sft	2726.00	₹ 20.95	₹ 57,102.89
68	Welding, including transportation of plant at site etc. complete By electric plant	cm	4500.00	₹ 6.13	₹ 27,605.81
69	Providing and fitting of 1 No. water Gysers, 2 No. water mixers. 4 No. Bibcock s, Mirrors, Jugs/ mugs & other bathroom accessories etc	job	1.00	₹ 29,925.00	₹ 29,925.00
70	Providing and laying D.I. Specials of Class K-12 suitable for mechanical jointing as per IS : 9523 Upto600 mm dia.	Qtt	8.00	₹ 17,880.39	₹ 1,43,043.10
71	Provision for Providing and fixing of pipe specials of standard quality incld. testing complete	job	1.00	₹ 1,19,700.00	₹ 1,19,700.00
72	Carraige of materials from source to road site of work including loading , unloading and stacking:-- Stone / stone soling for an av lead of 15 km	Cum	328.86	₹ 400.83	₹ 1,31,816.43
72.1	40mm aggregate for an av lead of 50 km	Cum	35.56	₹ 759.35	₹ 27,002.52
72.2	20mm aggregate for an av lead of 50 km	Cum	340.83	₹ 698.62	₹ 2,38,111.36
72.3	sand for an av lead of 40km	Cum	222.70	₹ 599.51	₹ 1,33,510.98
72.4	Pipes for an av lead of 20km	MT	29.57	₹ 356.74	₹ 10,548.95
72.5	cement for an av lead of 10 km	MT	170.52	₹ 302.89	₹ 51,648.95
72.6	steel for an av lead of 10 km	MT	15.51	₹ 302.89	₹ 4,697.84
72.7	wire Crates for an av lead of 15 Km	MT	0.59	₹ 1,073.55	₹ 633.39
72.8	Bricks for an av lead of 80 km	No	2885.00	₹ 2.65	₹ 7,654.91
72.9	200mm dia D.I pipe for an av lead of 15 km	mtr	9000.00	₹ 16.60	₹ 1,49,385.60
73	Carraige of materials from road site to site of work by manual labour including loading , unloading and stacking for an av lead of 600 Mtrs. Stone / stone soling	Cum	328.86	₹ 836.23	₹ 2,75,002.99

  
Head Draftsman

  
Superintending Engineer

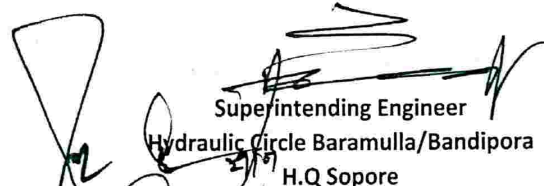
uction including successful testing and commissioning of 0.50 lac Gallon Capacity RCC service  
ervoir with sluice chamber, Laying / Fitting including Improvements of pipe network, Construction  
athroom, protection wall, chain link fencing , Anchor/ saddle blocks , intake/ collection chamber,  
erate protection works at head site for WSS Chuntimulla Gujjarpatti.  
ender Id: 2022\_IFC\_190841\_2.

Annexure "A" with Order No: SE/HYD/JJM of 2022-23 Dated :- - -2023.

S. No	Item Description	Units	Qty	Alloted Rate	Amount
73.1	40mm aggregate	Cum	35.56	₹ 768.44	₹ 27,325.59
73.2	20mm aggregate	Cum	340.83	₹ 710.83	₹ 2,42,271.33
73.3	sand	Cum	222.70	₹ 710.83	₹ 1,58,301.28
73.4	pipes	MT	29.57	₹ 399.68	₹ 11,818.58
73.5	Cement	MT	170.52	₹ 399.68	₹ 68,153.65
73.6	Steel	MT	15.51	₹ 680.89	₹ 10,560.57
73.7	wire crates	MT	0.59	₹ 316.97	₹ 187.01
73.8	Bricks	No	2885.00	₹ 1.33	₹ 3,838.97
73.9	200mm dia D.I pipe for an av lead of 2000 mtrs	mtr	9000.00	₹ 58.72	₹ 5,28,505.43
74	Providing, erecting and fixing of sign board of reqd. size made up of angle iron frame work 50x50x6mm with 1mm thick M.S sheet including priming, painting and proper lettering and embedding with 1:3:6 cement concrete complete job	job	1.00	₹ 5,985.00	₹ 5,985.00
<b>Total</b>					<b>₹ 1,55,63,297</b>

(One Crore Fifty Five lac Sixty Three Thousand Two Hundred and Ninety Seven Only)

  
Head Draftsman

  
Superintending Engineer  
Hydraulic Circle Baramulla/Bandipora  
H.Q Sopore

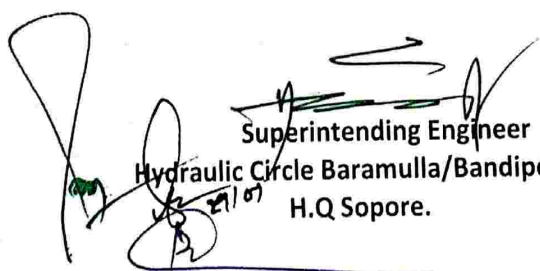


Annexure "B" with ORDER No: /SE/HYD/SPR/JJM of 2022-23 Dated:- -2023

### Terms and Conditions

1. The work is executed strictly as per approved design / drawing, specifications and JJM Guidelines. Any deviation or change in proposal/location is subject to the prior approval from the competent authority.
2. The Executive Engineer will draw the formal agreement with the contractor within 07 Days from the date of issuance of this allotment order.
3. The rates allotted are inclusive of all taxes applicable as per norms amended by competent authorities from time to time. Labour cess and royalties shall have to be borne by the executing agency/contractor.
4. The execution of work shall be subject to check by the third party monitoring agency (TPIQM) appointed by the Department.
5. The executing agency/contractor shall be bound for satisfactory performance of the work for **18 months** after the successful Commissioning of subject work and will have to make a trial run of the work for a period of **03 months** to the best satisfaction of the department.
6. The **Defective Liability Period** shall be for a period of **12 Months** which shall commence after the successful completion of the Trial Run.
7. No liability should be created on this account.
8. The total cost of work shall in no case exceed beyond **₹1,55,63,297.00 (One Crore Fifty Five lac Sixty Three Thousand Two Hundred and Ninety Seven Only)**.
9. In case the contractor fails to execute the work, the work shall be put to fresh tenders on the risk and cost of the contractor & the excess cost if involved shall be recovered from the contractor and strict action as warranted under contractual obligation shall be taken against the defaulter.
10. The time of completion of the work is reckoned **90-Days (Ninety Days)** as per the condition laid down in the e-NIT.
11. The bidder shall furnish a performance security equivalent to 03% of the value of the contract within one week of the issuance of allotment order in the shape of CDR/FDR/Bank Guarantee, valid for a period of 24 Months, which shall be released after successful fulfilment of the laid down conditions in SDB/e-Nit.
12. Geo Tagged Photographic evidences of the work; pre-execution, during execution and post execution should be maintained by the agency on his own expenses.
13. The executing agency/contractor must execute the work as per the requirements/specifications detailed in the relevant/applicable IS codes.
14. The tests for concrete and allied materials shall have to be carried out at reputed institute as per directions of Engineer in-charge and the charges for the same shall have to be borne by the executing agency/contractor.
15. All Environmental norms, labour laws and all other guidelines issued by competent authorities shall be followed in letter and spirit
16. All other terms & conditions as laid down in the standard bidding document, PWD form-25, GFR-2017 and manual of procurement of works 2019 shall remain in force.

  
Head Draftsman

  
Superintending Engineer  
Hydraulic Circle Baramulla/Bandipora  
H.Q Sopore.