

Government of Jammu and Kashmir
OFFICE OF THE SUPERINTENDING ENGINEER,
JAL SHAKTI DEPARTMENT HYDRAULIC CIRCLE DISTRICT BLA/BPR H.Q SOPORE
Member Secretary District Jal Jeevan Mission Baramulla/Bandipora
Email:sehydbla@gmail.com

Advertised Amount: ₹174.49 lac
Allotted Amount:- ₹ 1,81,47,024.00
Major Head:-4215-JJM
Time of completion: 90days

[ORDER No: 10 /SE/HYD/SPR/JJM of 2023-24]
Dated: - 13-05-2023

200
17/05/2023

Subject: Fixation of Contract for:


Construction including successful testing and commissioning of 0.50 lac Gallon Capacity RCC service reservoir with sluice chamber construction of Chowkidar/operator quarter, Bathroom, protection wall, chain link fencing, intake/ collection chamber, approach road & RCC Jacketing to existing Service Reservoirs for WSS Datiwas
Tender ID:- 2022_IFC_167024_25

- Reference:
1. Executive Engineer PHE Hydraulic Division Bandipora's e-NIT No 03/PHE/HYD/BPR of 2022-23 dated: 18-04-2022 issued under endorsement No: PHE/HYD/BPR/386-96 dated 18-04-2022.
 2. Revised District Action Plan (DAP) approved by the Chairman DJJM Bandipora circulated vide No: DDCB/BPR/2022/2056 Dated: 16-07-2022
 3. Minutes of Meeting held with District Development Commissioner Bandipora (Chairman DDJM) on 23-08-2022 minutes issued vide order No. 210-DDCB OF 2022 Dated: 02/09/2022, under endorsement No. DDCB/JJM/2022-23/3036-39 Dated: 02/09/2022.
 4. Administrative Approval Accorded by Chief Engineer Jal Shakti (PHE) Department Kashmir's Order No: CE/PHE/DB/JJM/335 of 02/2023 Dated: 13-02-2022..
 5. Technical Sanction issued by Chief Engineer Jal Shakti (PHE) Department Kashmir's Order No: CE/PHE/DB/824 of 02/2023 Dated: 17-02-2022.
 6. Minutes of Meeting of District Contract Committee circulated vide No: SE/Hyd/JJM/4785-98 dated: 28-07-2022.
 7. Amendment in operational guidelines for the implementation of Jal Jeevan Mission issued by NJJM, DDW&S ministry of Jal Shakti GOI vide F. No W-11016/10/2022-JJM-IV-DDWS Dated:- 21-06-2022.
 8. Modus operandi communicated by Chief Engineer. PHE Kashmir Vide circular No CE/PHE/MC/DB/13745-83 Dated: - 26-07-2022.
 9. Your letter of acceptance No:- TC/BPR/73 dated: 03-08-2022.

HD
17/5/23

Dear Sir,
For and on behalf of Lieutenant Governor of Union Territory of Jammu and Kashmir, the contract for above subject work is hereby fixed on the rates quoted and subsequently negotiated and accepted by you on Percentage rate basis as per the **Annexure "A"** of this allotment order with standard terms and conditions as laid down in the **Annexure "B"** of this allotment Order. The total cost of work shall be ₹ **1,81,47,024.00 (One Crore Eighty-One Lac Forty-Seven Thousand and Twenty-Four Only).**

o:- SE/HYD/JJM/1391-1405
dated:-13/05/2023


Superintending Engineer
Hydraulic Circle Baramulla/Bandipora
H.Q Sopore

Copy to the:-

1. Chief Engineer Kmr. Jal Shakti (PHE) Department Srinagar for favour information.
2. District Development Commissioner Bandipora (Chairman DJJM) for favour of information.
3. Additional District Development Commissioner Bandipora (Member DJJM) for information.
4. Assistant Commissioner Development Bandipora (Member DJJM) for information.
5. Divisional Forest officer Bandipora (Member DJJM) for information.
6. Chief Planning Officer Bandipora (Member DJJM) for information.
7. Chief Medical Officer Bandipora (Member DJJM) for information.
8. Chief Educational Officer Bandipora (Member DJJM) for information.
9. District Social Welfare Officer Bandipora/District Tribal Welfare Officer Bandipora (Member DJJM) for information.
10. District Information officer Bandipora (Member DJJM) for information.
11. Executive Engineer PHE Hydraulic Division Bandipora (Member DJJM) for information and necessary action.
12. Executive Engineer Jal Shakti PHE Mech. Division North Sopore (Member DJJM) for information.
13. Executive Engineer Ground Water Division Srinagar (Member DJJM) for information.
14. WAPCOS Limited Bandipora for information and necessary action.
15. File Concerned.

Adding successful testing and commissioning of 0.50 lac Gallon Capacity RCC service reservoir with construction of Chowkidar/operator quarter, Bathroom, protection wall, chain link fencing, intake/amber, approach road & RCC Jacketing to existing Service Reservoirs for WSS Datiwas
2022_IFC_167024_25

Annexure "A" with Order No: 10 SE/HYD/JJM of 2023-24 Dated :- 13 - 05 -2023

Item Description	Unit	Quantity	Alloted Rate	Amount
Earth work in excavation by manual means in trenches for foundations, drains, pipes, cables etc. (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides and ramming of bottoms and lift upto 1.5 m, including getting out excavated earth and disposal of surplus excavated earth as directed: All kinds of soil	Cum	88.350	₹ 453.44	₹ 40,061.42
Earth work in bulk excavation by manual means over areas exceeding 30 cm in depth, 1.5 m in width as well as 10 m ² on plan) including disposal of excavated earth lead upto 50 meters and lift upto 1.5 m, as directed by Engineer-in-Charge. All kinds of soil	Cum	18.840	₹ 560.92	₹ 10,567.81
Ordinary or hard rock	Cum	8.080	₹ 889.88	₹ 7,190.20
Earth work in bulk excavation by mechanical means (hydraulic excavator) over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 m ² on plan) including disposal of excavated earth lead upto 50 meters and lift upto 1.5 m, as directed by Engineer-in-Charge. All kinds of soil	Cum	4816.060	₹ 196.30	₹ 9,45,392.58
Ordinary Rock	Cum	174.030	₹ 393.48	₹ 68,478.02
Earth work in excavation by mechanical means (hydraulic excavator) in trenches for foundations, drains, pipes, cables etc. (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides and ramming of bottoms lift upto 1.5 m, including getting out excavated earth and disposal of surplus excavated earth as directed, within a lead of 50 metres: All kinds of soil	Cum	513.890	₹ 262.13	₹ 1,34,707.01
Ordinary or hard rock	Cum	13.720	₹ 488.80	₹ 6,706.34
Extra for every additional lift of 1.5 m or part thereof in excavation/banking excavated or stacked material : All kinds of soil :	Cum	26.180	₹ 84.92	₹ 2,223.10
Ordinary or hard rock	Cum	120.480	₹ 152.31	₹ 18,350.07
Random Rubble masonry with hard stone in foundation and plinth including leveling up with cement concrete 1:6:12 (1 Cement : 6 coarse sand : 12 graded stone aggregate 20mm nominal size) upto plinth level and curing complete with: Cement mortar 1:6 (1 Cement : 6 coarse sand)	Cum	38.920	₹ 4,612.66	₹ 1,79,524.73
Random rubble masonry with quarry stone laid in dry	Cum	15.900	₹ 2,597.40	₹ 41,298.66
Desilting of structures incld. Disposal of desilted material from site premises with all carriages lead & lifts etc. The job also includes, washing and cleaning of walls, beds, drains and floor etc with bleaching powder solution complete job. incld. disposal upto an undisputed site	Cum	84.730	₹ 560.92	₹ 47,527.09
Dismantling old plaster or skirting, raking out joints and cleaning the surface for plaster including disposal of rubbish to the dumping ground within 50 meters lead.	sqm	361.590	₹ 36.76	₹ 13,293.49
Making out holes in the walls for drilling/welding of tie rods in the holes	No	120.000	₹ 312.00	₹ 37,440.00
Supplying and stacking at site, Graded crushed stone aggregate of size, 90 mm to 45 mm with Stone screening of size, 13.2 mm nominal size (Type A), including laying of stone dust / Moorum as binding material including laying of water bound macadam sub-base with brick aggregate and binding material, earth etc. including screening, sorting, spreading to template and consolidation with power road roller 8-10 tonne capacity etc. complete inclusive of all carriages upto site of work complete job	Cum	1655.080	₹ 2,184.00	₹ 36,14,694.72
Dumping stone including cost of stones. in Horizontal on level	Cum	191.630	₹ 641.06	₹ 1,22,845.56

...ing successful testing and commissioning of 0.50 lac Gallon Capacity RCC service reservoir with construction of Chowkidar/operator quarter, Bathroom, protection wall, chain link fencing, intake/...
...ber, approach road & RCC Jacketing to existing Service Reservoirs for WSS Datiwas
...2022_IFC_167024_25

Annexure "A" with Order No: 10 SE/HYD/JJM of 2023-24 Dated :- 13 - 05 - 2023

Item Description	Unit	Quantity	Alloted Rate	Amount
...illing available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20 cm in depth, consolidating each deposited layer by ramming and watering, lead upto 50 m and lift upto 1.5 m	Cum	526.430	₹ 206.65	₹ 1,08,785.71
Providing & laying stone soling in horizontal on level.	Cum	79.210	₹ 849.06	₹ 67,253.73
Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centring and shuttering. All work upto plinth level with: 1:4:8 (1 cement : 4 coarse sand : 8 graded stone aggregate 40 mm nominal size)	Cum	59.180	₹ 5,056.31	₹ 2,99,232.64
Providing and laying in position specified grade of reinforced cement concrete including curing but excluding the cost of centering, shuttering, finishing and reinforcement. All works upto plinth level: 1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	Cum	75.100	₹ 8,112.79	₹ 6,09,270.56
Reinforced cement concrete work in walls (any thickness) including attached pilasters, buttresses, plinth and string courses, fillets, columns, pillars, piers, abutments, posts and struts upto floor five level including curing but excluding cost of centering shuttering, finishing and reinforcement. 1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	Cum	68.030	₹ 9,784.47	₹ 6,65,637.19
Reinforced cement concrete work in beams, suspended floors, roofs having slope upto 15°, landings, balconies, shelves, chajjas, lintels, bands, plain window sills, staircases and spiral stair cases upto five level including curing but excluding the cost of centering, shuttering, finishing and reinforcement with: 1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	Cum	21.240	₹ 10,243.32	₹ 2,17,568.20
Reinforced cement concrete work in arches, archribs, domes, vaults shells, folded plate and roofs having slope more than 15° upto floor five level level including curing but excluding the cost of centering, shuttering finishing and reinforcement with:- 1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	Cum	11.810	₹ 10,820.70	₹ 1,27,792.48
Providing & fixing of main hole cover 0.75 x 0.75 mtr of standard quality with angle iron frame incld all necessary fittings complete	No	4.000	₹ 3,640.00	₹ 14,560.00
Providing & fixing of main hole cover 0.90 x 0.90 mtr of standard quality with angle iron frame incld all necessary fittings complete	No	8.000	₹ 4,680.00	₹ 37,440.00
Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level: Thermo-Mechanically Treated bars of grade Fe-500D or more	kg	16747.240	₹ 90.67	₹ 15,18,425.36
Structural steel work in built up sections, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete Welded	kg	2695.500	₹ 106.23	₹ 2,86,331.10
Structural steel work in single section, fixed with or without connecting plate, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete	kg	7046.000	₹ 94.67	₹ 6,67,053.28
Centering and shuttering including strutting, propping etc. and removal of form for: Foundations, footings, bases of columns etc. for mass concrete.	sqm	634.490	₹ 272.79	₹ 1,73,083.80
Walls (any thickness) including attached pilasters, buttresses, plinth and string courses etc.	sqm	1597.220	₹ 596.80	₹ 9,53,227.28

Head Draftsman

Technical Officer

Superintending Engineer

including successful testing and commissioning of 0.50 lac Gallon Capacity RCC service reservoir with construction of Chowkidar/operator quarter, Bathroom, protection wall, chain link fencing, intake/amber, approach road & RCC Jacketing to existing Service Reservoirs for WSS Datiwas
2022_IFC_167024_25

Annexure "A" with Order No: 10 SE/HYD/JJM of 2023-24 Dated :- 13 - 05 - 2023

Item Description	Unit	Quantity	Alloted Rate	Amount
Suspended floors, roofs, landings, balconies and access platforms	sqm	57.830	₹ 661.02	₹ 38,227.02
Lintel, beams, plinth beams, girders, bressumers and cantilevers	sqm	44.390	₹ 522.96	₹ 23,214.37
Arches, domes, vaults upto 6 m span	sqm	95.030	₹ 2,170.27	₹ 2,06,240.95
Extra for shuttering in circular work	sqm	417.320	₹ 119.35	₹ 49,807.31
Extra for shuttering in circular work: foundation	sqm	13.250	₹ 54.56	₹ 722.90
Extra for shuttering in circular work: BEAMS	sqm	27.490	₹ 104.59	₹ 2,875.26
Extra for shuttering in circular work: DOMES	sqm	95.030	₹ 1,048.79	₹ 99,666.32
Edges of slabs and breaks in floors and walls : Under 20 cm wide	Rm	105.210	₹ 251.99	₹ 26,512.08
Columns, pillars, piers, abutments, posts and struts.	sqm	6.280	₹ 707.36	₹ 4,442.20
Providing and fixing of 50mm dia G.I half bend of standard quality to be fixed in dome for aeration purpose	No	65.000	₹ 260.00	₹ 16,900.00
Providing and incorporating PGI sheets strips 0.8mm thick at construction joints incld. All carriages complete job	Sqm	8.300	₹ 416.00	₹ 3,452.80
Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centring and shuttering. All work upto plinth level with: 1:3:6 (1 cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size)	Cum	135.000	₹ 5,655.25	₹ 7,63,458.70
12mm Cement plaster finished with a floating coat of neat cement mix:1:3 (1 cement 3 sand)	sqm	424.000	₹ 357.50	₹ 1,51,580.00
Providing and fixing G.I. chain link fabric fencing of required width in mesh size 50x50 mm including strengthening with 2 mm dia wire nuts, bolts and washers as required complete as per the direction of Engineer-incharge. Made of G.I. wire of dia 4 mm	sqm	540.000	₹ 762.84	₹ 4,11,933.60
12mm Cement plaster of mix: 1 : 4 (1 cement : 4 fine sand)	sqm	1484.600	₹ 270.45	₹ 4,01,513.04
Providing and laying in position specified grade of reinforced cement concrete including curing but excluding the cost of centering, shuttering, finishing and reinforcement. All works upto plinth level: 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size)	Cum	3.490	₹ 7,257.83	₹ 25,329.82
Providing and laying cement concrete in retaining walls, return walls, walls (any thickness) including attached pilasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchors blocks, plain window sills, fillets etc upto floor V level, including curing but excluding the cost of centring, shuttering and finishing with 1:3:6 (1 cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size)	Cum	246.750	₹ 7,559.96	₹ 18,65,419.54
Supply and filling GSB (granular sub-base) in layer not exceeding 22cm in thickness & aggregate size does not exceed 90mm incld. carriage	Cum	3.110	₹ 676.00	₹ 2,102.36
Providing & laying damp-proof Course 40 mm thick with cement concrete 1:2:4 (1 cement:2 coarse sand: 4 graded stone agg 12.5 mm nominal size) and curing complete	sqm	26.940	₹ 355.27	₹ 9,571.09
Brick work with common burnt clay (non-modular) bricks of class designation 7.5 in foundation and plinth including curing in Cement mortar 1:4 (1 cement : 4 coarse sand)	Cum	24.960	₹ 7,437.37	₹ 1,85,636.83
Extra for brick work with common burnt clay bricks/cement concrete bricks in superstructure above plinth level upto floor five level	Cum	20.810	₹ 1,514.26	₹ 31,511.77
Cement concrete flooring 1:2:4 (1cement: 2 coarse sand: 4 graded stone aggregate) finished with a floating coat of neat cement including cement slurry and curing complete, but excluding the cost of nosing of steps etc. complete. 50 mm thick with 20mm nominal size stone aggregate	sqm	39,230	₹ 577.72	₹ 22,663.96

Supervising Engineer

Providing successful testing and commissioning of 0.50 lac Gallon Capacity RCC service reservoir with construction of Chowkidar/operator quarter, Bathroom, protection wall, chain link fencing, intake/amber, approach road & RCC Jacketing to existing Service Reservoirs for WSS Datiwas
2022_IFC_167024_25

Annexure "A" with Order No: 10 SE/HYD/JJM of 2023-24 Dated :- 13 - 05 - 2023

Item Description	Unit	Quantity	Alloted Rate	Amount
Providing wood work in frames of doors, windows, clerestory windows and other frames, wrought framed and fixed in position with hold fast lugs or with dash fasteners of required dia and length hold fast lugs or with dash fasteners shall be paid for separately): Second class kail wood	Cum	0.920	₹ 95,747.96	₹ 88,088.13
Providing and fixing glazed shutters for, windows and clerestory windows fixing with butt hinges of required size with necessary screws, excluding panelling which will be paid for separately, all complete as per direction of Engineer-in-charge. (Note: -Butt hinges and necessary screws shall be paid separately). First class Kail wood (35mm)	sqm	37.150	₹ 3,217.55	₹ 1,19,532.06
Providing and fixing of 4mm thick Float glass panes(weighing not less than 10 kg/sqm	sqm	18.730	₹ 832.00	₹ 15,583.36
Providing and fixing fly proof wire gauze to windows, clerestory windows and doors with M.S Flat 15x3 mm and nuts and bolts complete. Galvanized M.S wire gauze with 0.63 mm dia wire and 1.4 mm aperture on both sides	sqm	18.730	₹ 727.27	₹ 13,621.80
Providing hoisting and fixing trusses/purlins /rafters/posts/ post-plates or like components including cost of screws etc. complete Second class Kail wood	Cum	0.520	₹ 1,67,556.27	₹ 87,129.26
Providing corrugated G. S. sheet roofing including vertical/curved surface fixed with polymer coated J or L hooks, bolts and nuts 8mm diameter with bitumen and G.I limpet washers or with G.I. limpet washers filled with white lead, including a coat of approved steel primer and two coats of approved paint on overlapping of sheets complete (upto any pitch in horizontal/vertical or curved surface)excluding the cost of purlins, rafters and trusses and including cutting to size and shape wherever required. 0.63 mm thick with zinc coating not less than 275 gram/m2	sqm	83.310	₹ 989.87	₹ 82,466.24
Providing & fixing colour corrugated ridges or hips of width 60cm overall width plain G.S. sheets fixed with polymer coated J. or L hooks, bolts and nuts 8mm dia G.I. limpet and bitumen washers complete. 0.63 mm thick with zinc coating not less than 275 gram/m2	Rm	35.070	₹ 719.00	₹ 25,215.47
Providing and fixing plained eaves boarding (Kail wood). 250x32 mm (nominal size)	Rm	50.750	₹ 721.66	₹ 36,624.04
Providing and fixing of Gsheet soffit of approved quality, colour and texture complete	sqm	17.740	₹ 676.00	₹ 11,992.24
Providing & fixing of Anchor bolts of 16mm dia 9"long	No	20.000	₹ 260.00	₹ 5,200.00
Providing and fixing of of Hardware items Aidrops 150mm dia	No	2.000	₹ 416.00	₹ 832.00
Providing and fixing aluminum tower bolts ISI marked anodized (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade with necessary screws etc. complete:	No	2.000	₹ 83.56	₹ 167.13
Tower bolt (150x10 mm) long	No	5.000	₹ 59.64	₹ 298.22
Tower bolt (100x10 mm) long	No	3.000	₹ 69.00	₹ 207.01
Providing and fixing aluminum handles ISI marked anodized (anodic coating not less than grade AC 10 as per IS: 1868) transparent or dyed to required colour and shade with necessary screws etc. complete. 125mm	No	4.000	₹ 54.39	₹ 217.57
100 mm	No	4.000	₹ 46.80	₹ 187.20
Air hooks	No	4.000	₹ 46.80	₹ 187.20
Providing and applying white cement based putty of specified thickness, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete. (2 mm thick)	sqm	130.710	₹ 179.30	₹ 23,435.78
Distemper with 1st quality acrylic distemper, having VOC (Volatile Organic Compound) content less than 50 grams/ liter, of approved brand and manufacture, including applying additional coats wherever required, to achieve even shade and colour. Two coats	sqm	79.160	₹ 81.80	₹ 6,474.97

Lead Draftsman

Technical Officer

Superintending Engineer

successful testing and commissioning of 0.50 lac Gallon Capacity RCC service reservoir with construction of Chowkidar/operator quarter, Bathroom, protection wall, chain link fencing, intake/ approach road & RCC Jacketing to existing Service Reservoirs for WSS Datiwas
 number. approach road & RCC Jacketing to existing Service Reservoirs for WSS Datiwas
 2022_IFC_167024_25

Annexure "A" with Order No: 10 SE/HYD/JJM of 2023-24 Dated :- 13 - 05 - 2023

Item Description	Unit	Quantity	Alloted Rate	Amount
Finishing walls with water proofing cement paint of required shade New work (two or more coats applied @ 3.84 kg/10sqm)	sqm	66.820	₹ 95.47	₹ 6,379.44
Finishing with Deluxe multi surface paint system for interiors and exteriors using primer as per manufacturers' specifications; painting wood work with deluxe multi surface paint of required shade. Two or more coats applied @ 0.90litre/10sqm over an under coat of primer applied @ 0.75litre/10sqm of approved brand and manufacture	sqm	38.460	₹ 130.52	₹ 5,019.80
Providing and fixing of GI pipes complete with G.I fittings & clamps cold. cutting & making good etc complete	Rm	48.000	₹ 291.20	₹ 13,977.60
Providing and fixing of pvc pipes, cables with all pvc fittings incld. trenching and refilling etc (external with flateral 100mm dia pvc pipe) along with bends, sockets etc (prince quality)	Rm	26.000	₹ 780.00	₹ 20,280.00
Applying priming coats with primer of approved brand and manufacture, having low VOC (Volatile Organic Compound) content. With ready mixed pink or grey primer on wood work (hard and soft wood) having VOC content less than 50 grams/ liter	sqm	22.010	₹ 61.88	₹ 1,361.98
Painting with synthetic enamel paint of approved brand and manufacture to give an even shade Two or more coats on new work	sqm	22.010	₹ 126.83	₹ 2,791.48
Providing & fixing White vitreous china water closet squatting pan (Indian type) along with "S" or "P" trap including dismantling of old WC seat and "S" or "P" trap at site complete with all operations including all necessary materials, labour and disposal of dismantled material i/c malba, all complete as per the direction of Engineer-in charge Long pattern W.C Pan of size 580x440 mm	No	2.000	₹ 3,098.58	₹ 6,197.15
Providing and placing on terrace (at all floor levels) polyethylene water storage tank ISI : 12701 marked indicating the BIS License No. with cover and suitable locking arrangement and making necessary holes for inlet, outlet and overflow pipes including all associated fittings and the base support for tank [Sintex, Electroplast, Star, Lotus or equivalent having valid ISI license]	litre	1000.000	₹ 8.32	₹ 8,320.00
Providing and fixing 1st quality ceramic glazed wall tiles conforming to IS : 15622 (thickness to be specified by the manufacturer), of approved make, in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer- in-Charge, in starting, risers of steps and dados over 12 mm thick bed of cement mortar 1:3 (1 cement : 3 coarse sand) and jointing with grey cement slurry @ 3.3 kg per sqm, including pointing in white cement mixed with pigment of matching shade complete. (wall / floor tiles)	Sqm	25.340	₹ 1,207.49	₹ 30,597.85
providing & fixing of stainless steel sink incld waste pipe	No	1.000	₹ 2,600.00	₹ 2,600.00
Providing and fixing of electric and heating points including wiring for lightning points in 1.5 sq. mm, PVC Insulated copper wire and 2.5 sq. mm PVC insulated multi strand copper wire, 6mm one way switches, 2 mm thick PVC conduit/ channel with bends, junction boxes etc 6amp 5 pole MCS, 10 Amp DP MCB, 2 way for housing MCB, hylan sheet with wooden box recessed in walls with accessories complete: Lighting point	No	13.000	₹ 1,196.00	₹ 15,548.00
Heating point	No	7.000	₹ 1,716.00	₹ 12,012.00
Fan with dimmer	No	2.000	₹ 3,120.00	₹ 6,240.00
Exhaust Fan 12" x12"	No	4.000	₹ 2,600.00	₹ 10,400.00
Applying priming coat:- With ready mixed red oxide Zinc Chromate primer of approved brand and manufacture on steel work (second coat)	sqm	559.600	₹ 30.06	₹ 16,819.34

Head Draftsman

Technical Officer

AS

successful testing and commissioning of 0.50 lac Gallon Capacity RCC service reservoir with
 construction of Chowkidar/operator quarter, Bathroom, protection wall, chain link fencing , intake/
 approach road & RCC Jacketing to existing Service Reservoirs for WSS Datiwas
 2022_IFC_167024_25

Annexure "A" with Order No: 10 SE/HYD/JJM of 2023-24 Dated :- 13 - 05 -2023


Item Description	Unit	Quantity	Alloted Rate	Amount
Painting with aluminum paint of approved brand and manufacture to give an even shade. Two or more coats on new work	sqm	559.600	₹ 124.18	₹ 69,488.89
Providing fixing of 30 watt luminous halogen lights	No	1,000	₹ 4,160.00	₹ 4,160.00
Providing and mixing of water proofing material or equivalent for RCC work	kg	536.000	₹ 52.00	₹ 27,872.00
Providing and fixing of PVC pipes for aeration purposes	mtr	50.000	₹ 104.00	₹ 5,200.00
Providing and fitting of 1 No. water Gysers, 2 No. water mixers. 4 No. Bibcock s, Mirrors, Jugs/ mugs & other bathroom accessories etc.	job	2.000	₹ 31,200.00	₹ 62,400.00
Providing and fitting of bedroom items Floor mating, 01 No. beds with necessary beding and mattresses , 01 no. wardrobes for cloths, 1 no. locker, 4 chairs and one table, Utensils gas with gas stove etc	job	1.000	₹ 52,000.00	₹ 52,000.00
Carraige of materials from source to road site of work including loading , unloading and stacking:-- Stone / stone soling for an av lead of 18 km	Cum	325.390	₹ 462.47	₹ 1,50,482.88
40mm aggregate for an av lead of 50 km	Cum	53.220	₹ 791.70	₹ 42,134.50
20mm aggregate for an av lead of 50 km	Cum	506.400	₹ 728.39	₹ 3,68,855.64
sand for an av lead of 45 km	Cum	334.250	₹ 676.72	₹ 2,26,193.90
cement for an av lead of 10 km	MT	255.360	₹ 315.80	₹ 80,641.67
steel for an av lead of 10 km	MT	26.740	₹ 315.80	₹ 8,444.39
Bricks for an av lead of 80 km	No	12480.000	₹ 2.77	₹ 34,524.67
Carraige of materials from road site to site of work by manual labour including loading , unloading and stacking for an av lead of 500 Mtrs. Stone / stone soling	Cum	325.390	₹ 760.03	₹ 2,47,307.49
40mm aggregate	Cum	53.220	₹ 698.42	₹ 37,169.71
20mm aggregate	Cum	506.400	₹ 646.06	₹ 3,27,162.39
sand	Cum	334.250	₹ 646.06	₹ 2,15,943.98
Cement	MT	255.360	₹ 369.92	₹ 94,463.49
Steel	MT	26.740	₹ 630.20	₹ 16,851.45
Bricks	No	12480.000	₹ 1.20	₹ 14,926.08
Providing, erecting and fixing of sign board 2'6"x4' made up of angle iron frame work 50x50x6mm with 1mm thick M.S sheet including priming, painting and proper lettering and embedding with 1:3:6 cement concrete complete job	job	1.000	₹ 6,240.00	₹ 6,240.00

Total ₹ 1,81,47,024

(Rupees One Crore Eighty One Lac Forty Seven Thousand And Twenty Four Only)


Head Draftsman


Technical Officer


Superintending Engineer
Hydraulic Circle Baramulla/Bandipora
H.Q Sopore

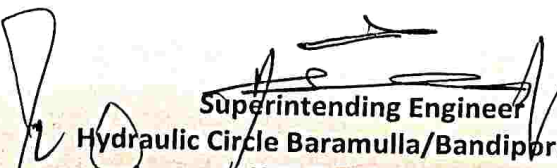
Annexure "B" with ORDER No: 10 /SE/HYD/SPR/JJM of 2023-24 Dated:- 13-05-2023

Terms and Conditions

1. The work is executed strictly as per approved design / drawing, specifications and JJM Guidelines. Any deviation or change in proposal/location is subject to the prior approval from the competent authority.
2. The Executive Engineer will draw the formal agreement with the contractor within 07 Days from the date of issuance of this allotment order.
3. The rates allotted are inclusive of all taxes applicable as per norms amended by competent authorities from time to time. Labour cess and royalties shall have to be borne by the executing agency/contractor.
4. The execution of work shall be subject to check by the third-party monitoring agency (TPIQM) appointed by the Department.
5. The date of start of the work shall be reckoned within 05 days of issuance of LOI/allotment order whichever is earlier.
6. The executing agency/contractor shall be bound for satisfactory performance of the work for **18 months** after the successful Commissioning of subject work and will have to make a trial run of the work for a period of **03 months** to the best satisfaction of the department.
7. The **Defective Liability Period** shall be for a period of **12 Months** which shall commence after the successful completion of the Trial Run.
8. No liability should be created on this account.
9. The total cost of work shall in no case exceed beyond of **₹ 1,81,47,024.00 (One Crore Eighty One Lac Forty Seven Thousand And Twenty Four Only)**.
10. In case the contractor fails to execute the work, the work shall be put to fresh tenders on the risk and cost of the contractor & the excess cost if involved shall be recovered from the contractor and strict action as warranted under contractual obligation shall be taken against the defaulter.
11. The time of completion of the work is reckoned **90-Days (Ninety Days)** as per the condition laid down in the e-NIT.
12. The bidder shall furnish a performance security equivalent to 03% of the value of the contract within one week of the issuance of allotment order in the shape of CDR/FDR/Bank Guarantee, valid for a period of 24 Months, which shall be released after successful fulfilment of the laid down conditions in SDB/e-Nit.
13. Geo Tagged Photographic evidence of the work; pre-execution, during execution and post execution should be maintained by the agency on his own expenses.
14. The executing agency/contractor must execute the work as per the requirements/specifications detailed in the relevant/applicable IS codes.
15. The tests for concrete and allied materials shall have to be carried out at reputed institute as per directions of Engineer in-charge and the charges for the same shall have to be borne by the executing agency/contractor.
16. All Environmental norms, labour laws and all other guidelines issued by competent authorities shall be followed in letter and spirit.
17. All other terms & conditions as laid down in the standard bidding document, PWD form-25, GFR-2017 and manual of procurement of works 2022 shall remain in force.


Head Draftsman


Technical officer


Superintending Engineer
Hydraulic Circle Baramulla/Bandipora
H:Q Sopore.